

## SUSPENSION GLASS STRUCTURE BLACK ROD 100 MM

|                                |                                       |
|--------------------------------|---------------------------------------|
| <b>Number of heads</b>         | 1                                     |
| <b>Mounting</b>                | Track mounting                        |
| <b>Lamps description</b>       | LED Array 14W   189 lm 2700K CRI 90   |
| <b>Luminaire luminous flux</b> | Extreme Cut-off. See reference number |
| <b>Voltage (V)</b>             | 48                                    |
| <b>Environment</b>             | Indoor                                |



### OPTICAL

|                                    |           |
|------------------------------------|-----------|
| <b>Aiming</b>                      | Fixed     |
| <b>Light distribution symmetry</b> | Symmetric |

### ELECTRICAL


|                                 |                     |
|---------------------------------|---------------------|
| <b>Transformer availability</b> | Separate item       |
| <b>Transformer mounting</b>     | Remote              |
| <b>Transformer type</b>         | Electronic dimmable |
| <b>Emergency</b>                | Without             |
| <b>Insulation class</b>         | Class III           |

### Suspension Glass Structure Black Rod 100 mm


designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.</div>

|                      |                   |
|----------------------|-------------------|
| ● 03.6480.00 - 706lm | Transparent Glass |
| ● 03.6480.FU - 482lm | Smoked Glass      |
| ● 03.6480.RC - 292lm | Red Glass         |

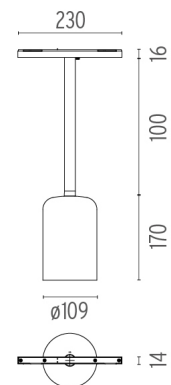

### CERTIFICATIONS

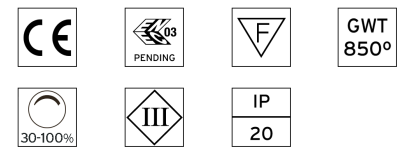

## Suspension Glass Structure Black Rod 100 mm . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




### Suspension Glass Structure Black Rod 100 mm

designed by Vincent Van Duysen

Suspended luminaire with rigid rod and blown glass in several finishes to be installed in the Infra-Structure system.

- 03.6480.00 - 706lm      Transparent Glass
- 03.6480.FU - 482lm      Smoked Glass
- 03.6480.RC - 292lm      Red Glass

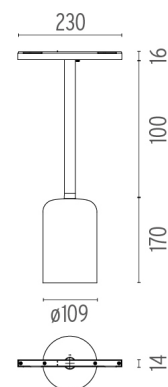

### CERTIFICATIONS

