

## LIGHT SUPPLY FIXED TRIM DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array High Performances 29W 2929 lm 4000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	156
<b>Recessed depth (mm)</b>	277
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,98






**Light Supply Fixed Trim Dimmable**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

- 03.6810.3BADA - 62° - 1549lm White / White
- ◐ 03.6810.3CADA - 47° - 1828lm White / Aluminium
- ◑ 03.6810.1BADA - 62° - 1549lm Black / White
- ◒ 03.6810.1CADA - 47° - 1828lm Black / Aluminium

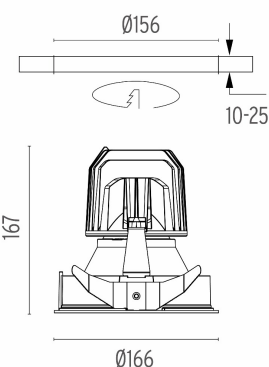

### CERTIFICATIONS

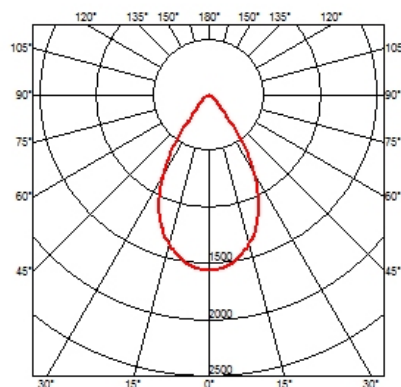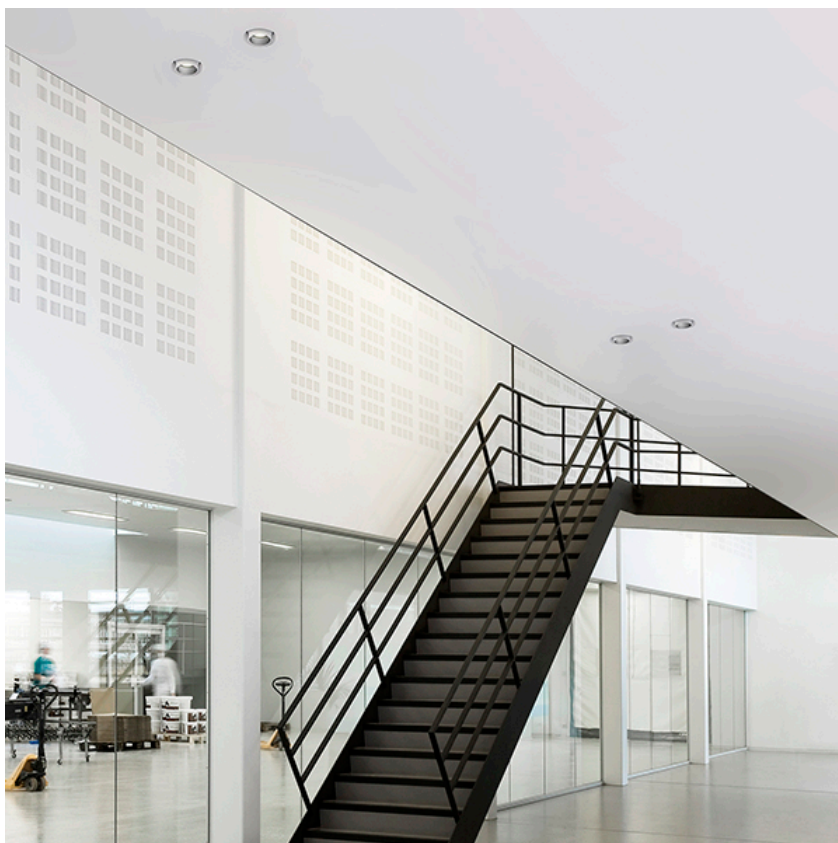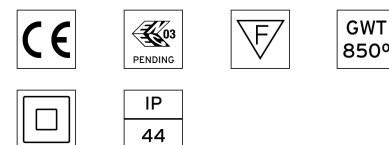

## Light Supply Fixed Trim Dimmable . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base





**Lamp type:**


LED Array



**Light Supply Fixed Trim Dimmable**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Remote 220/240V power supply included.

-  03.6810.3BADA - 62° - 1549lm White / White
-  03.6810.3CADA - 47° - 1828lm White / Aluminium
-  03.6810.1BADA - 62° - 1549lm Black / White
-  03.6810.1CADA - 47° - 1828lm Black / Aluminium

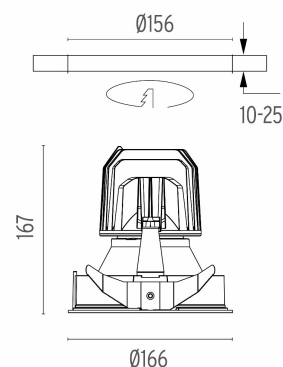

**CERTIFICATIONS**

