

LIGHT STRIPE 600 MM

Number of heads

Mounting Track mounting

Top LED 15W 1307 lm 3000K CRI 90 Lamps description

Luminaire luminous flux See reference number

Voltage (V) 24 **Environment** Indoor

Notes The endcaps increase the product in 3 mm. Running Magnet

2.0 luminaires are not compatible with Running Magnet 1.0.



OPTICAL

Aiming Fixed Light distribution symmetry Symmetric Beam angle 108°

ELECTRICAL

Transformer availability Separate item **Transformer mounting** Remote Electronic Transformer type **Emergency** Without


Light Stripe 600 mm designed by FLOS Architectural


Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

03.7003.14 - 840lm Black

PHYSICAL

606 Length (mm) Weight (kg) 0,68

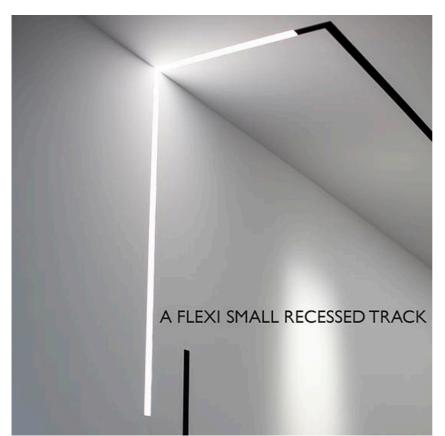




CERTIFICATIONS











Flos.architectural@flos.com www.flos.com



Light Stripe 600 mm . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED



Light Stripe 600 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

03.7003.14 - 840lm

Black




CERTIFICATIONS











Flos.architectural@flos.com www.flos.com