

## LIGHT STRIPE 900 MM

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Top LED 22,5W 1855 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	The endcaps increase the product in 3 mm. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0.



### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	108°

### Light Stripe 900 mm

designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.



### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without

● 03.7004.14 - 1200lm Black

### PHYSICAL

<b>Length (mm)</b>	906
<b>Weight (kg)</b>	1,02

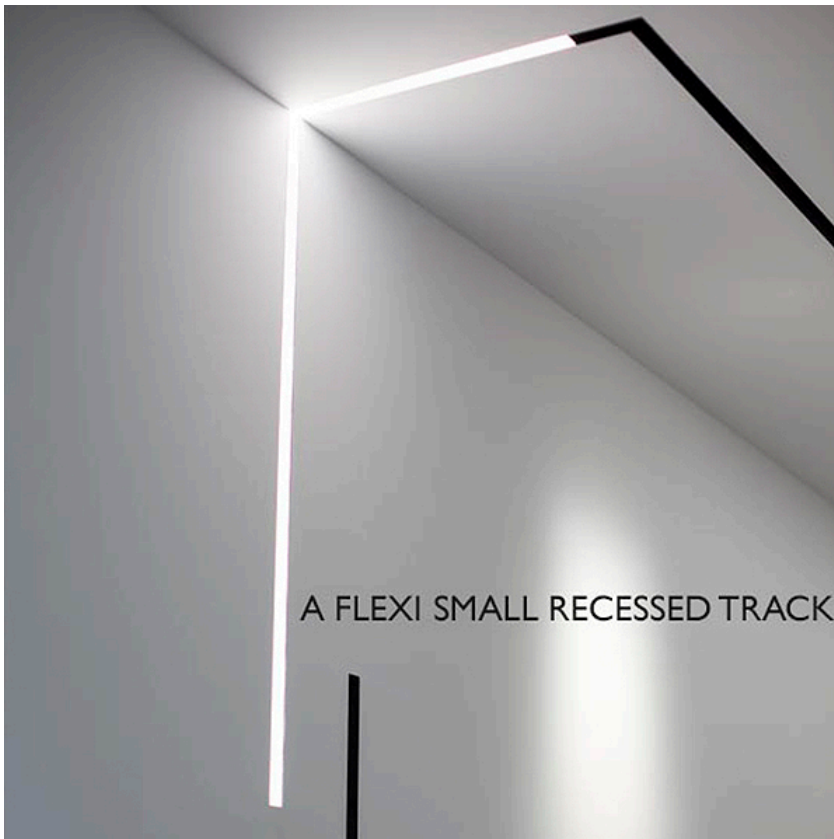

### CERTIFICATIONS



## Light Stripe 900 mm . Lamps



**Top LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Top LED



**Light Stripe 900 mm**  
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7004.14 - 1200lm      Black



### CERTIFICATIONS

