

## LIGHT STRIPE 1200 MM

|                                |   |
|--------------------------------|---|
| <b>Number of heads</b>         | 1   |
| <b>Mounting</b>                | Track mounting  |
| <b>Lamps description</b>       | Top LED 30W 2473 lm 2700K CRI 90  |
| <b>Luminaire luminous flux</b> | See reference number  |
| <b>Voltage (V)</b>             | 24  |
| <b>Environment</b>             | Indoor  |
| <b>Notes</b>                   | The endcaps increase the product in 3 mm. Running Magnet 2.0 luminaires are not compatible with Running Magnet 1.0. |



### OPTICAL

|                                    |           |
|------------------------------------|-----------|
| <b>Aiming</b>                      | Fixed     |
| <b>Light distribution symmetry</b> | Symmetric |
| <b>Beam angle</b>                  | 108°      |

### Light Stripe 1200 mm

designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.



### ELECTRICAL

|                                 |               |
|---------------------------------|---------------|
| <b>Transformer availability</b> | Separate item |
| <b>Transformer mounting</b>     | Remote        |
| <b>Transformer type</b>         | Electronic    |
| <b>Emergency</b>                | Without       |

● 03.7006.14 - 1600lm Black

### PHYSICAL

|                    |      |
|--------------------|------|
| <b>Length (mm)</b> | 1206 |
| <b>Weight (kg)</b> | 1,36 |

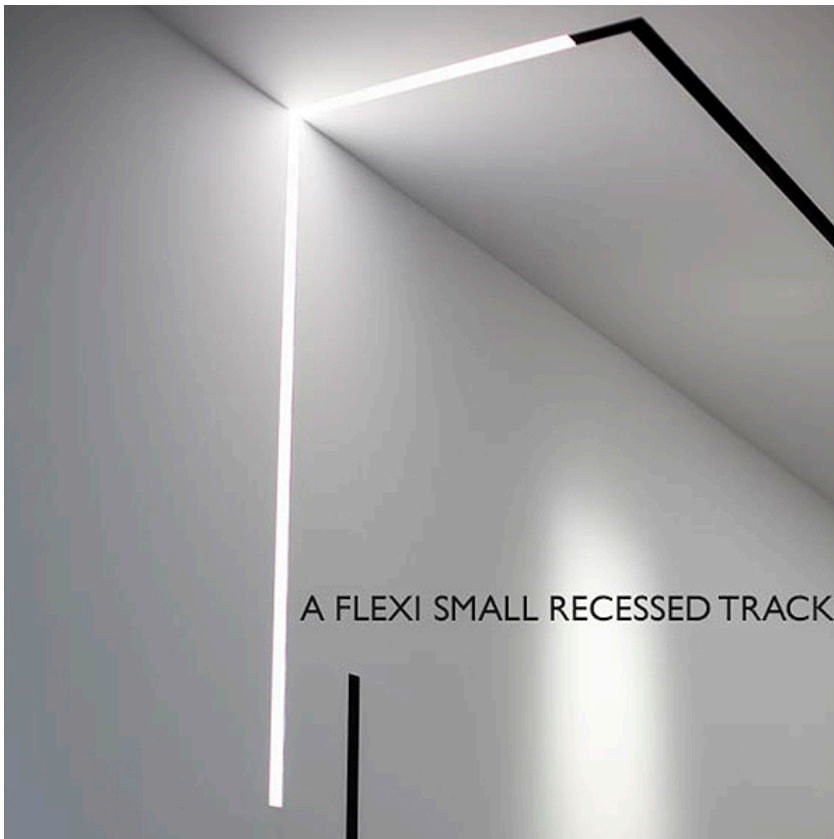

### CERTIFICATIONS



## Light Stripe 1200 mm . Lamps



**Top LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Top LED



**Light Stripe 1200 mm**  
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet 2.0 System. Opaline endcaps to create continuous lines of light included.

● 03.7006.14 - 1600lm      Black



### CERTIFICATIONS

