

LIGHT TUBE Ø30 DIRECT 900 MM DIMMABLE I-10V

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Track mounting |
| Lamps description | Top LED 23W 1820 lm 2700K CRI 90 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 48 |
| Environment | Indoor |
| Notes | System turning fastening elements 0°-90° with a magnetic connection and mechanic security lock for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end. Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version. |



Light Tube ø30 Direct 900 mm Dimmable I-10V

designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

● 03.8100.40.IV - 1485lm White


● 03.8100.14.IV - 1485lm Black

OPTICAL

| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |
| Beam angle | 145° |

ELECTRICAL

| | |
|---------------------------------|---------------------------|
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable I-10V |
| Emergency | Without |

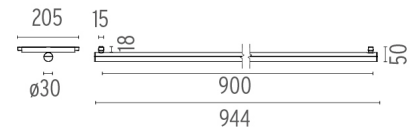

CERTIFICATIONS



Light Tube ø30 Direct 900 mm Dimmable I-10V . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED




**Light Tube ø30 Direct 900 mm
Dimmable I-10V**

designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

● 03.8100.40.IV - 1485lm White

● 03.8100.14.IV - 1485lm Black

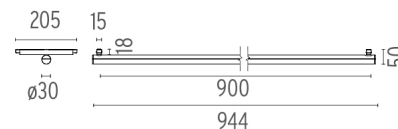

CERTIFICATIONS

