

FLOS

LIGHT TUBE Ø30 DIRECT 1500 MM DIMMABLE I-10V

Number of heads	1
Mounting	Track mounting
Lamps description	Top LED 38W 2912 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	System turning fastening elements 0°-90° with a magnetic connection and mechanic security lock for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end. Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



Light Tube ø30 Direct 1500 mm Dimmable I-10V

designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

● 03.8102.40.1V - 2331lm White


● 03.8102.14.1V - 2331lm Black

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	145°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V
Emergency	Without

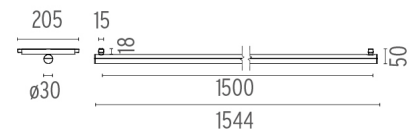

CERTIFICATIONS



Light Tube ø30 Direct 1500 mm Dimmable I-10V . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED



Light Tube ø30 Direct 1500 mm Dimmable I-10V

designed by Vincent Van Duysen

Diffused LED light module to be installed in The Infra-Structure System.

● 03.8102.40.IV - 2331lm White

● 03.8102.14.IV - 2331lm Black



CERTIFICATIONS

