

LIGHT SHADOW FIXED TRIM DALI VERSION 2 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 5,4W 560 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Length (mm)	77
Recessed depth (mm)	75
Weight (kg)	0,25





Light Shadow Fixed Trim Dali Version 2 Spots Optic Spot



designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.8824.40.DA - 432lm White / White
- 03.8824.14.DA - 432lm Black / White
- ◐ 03.8826.40.DA - 435lm White / Chrome
- ◑ 03.8826.14.DA - 435lm Black / Chrome
- ◒ 03.8827.40.DA - 429lm White / Matt Gold
- ◓ 03.8827.14.DA - 429lm Black / Matt Gold
- ◔ 03.8825.40.DA - 423lm White / Black
- ◕ 03.8825.14.DA - 423lm Black / Black

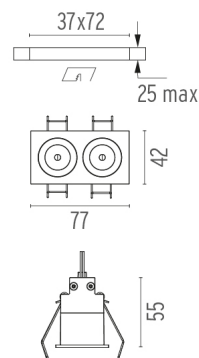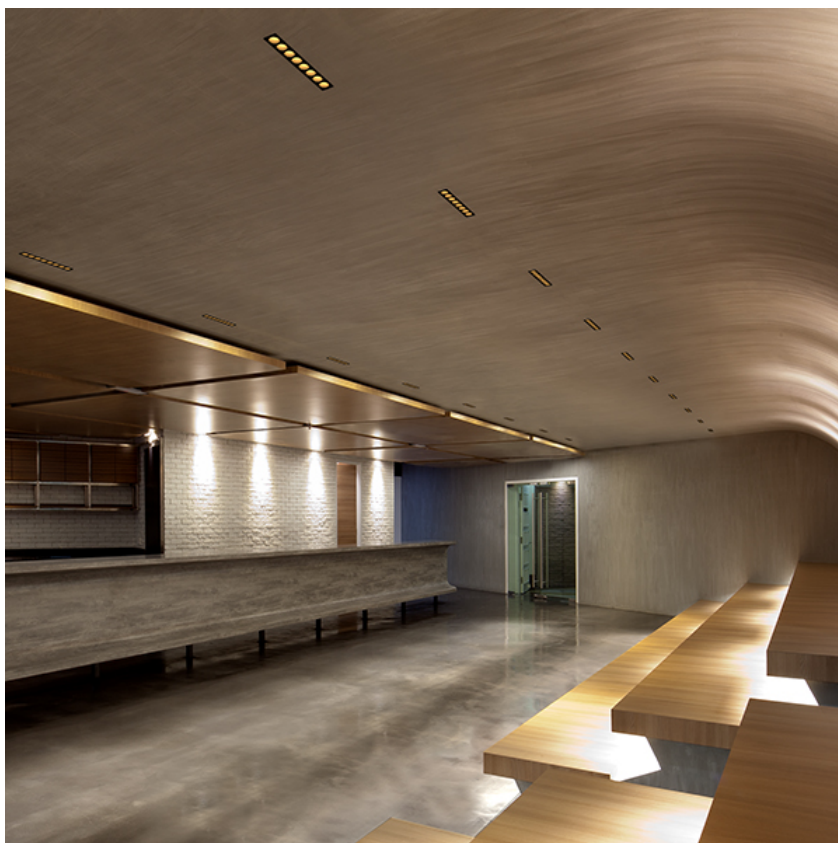

CERTIFICATIONS

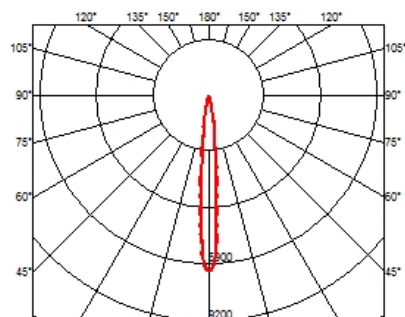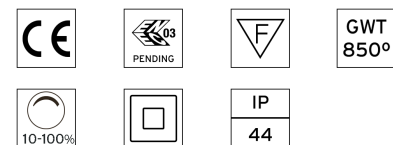

Light Shadow Fixed Trim Dali Version 2 Spots Optic Spot . Lamps




Power LED

Lamp category:
LED

Socket:
Special base



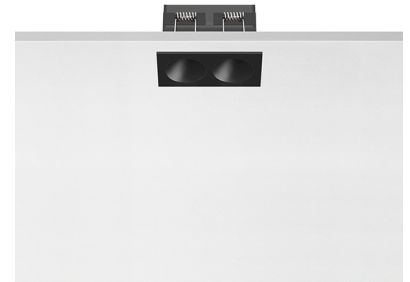




Lamp type:
Power LED




Light Shadow Fixed Trim Dali Version 2 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

-  03.8824.40.DA - 432lm White / White
-  03.8824.14.DA - 432lm Black / White
-  03.8826.40.DA - 435lm White / Chrome
-  03.8826.14.DA - 435lm Black / Chrome
-  03.8827.40.DA - 429lm White / Matt Gold
-  03.8827.14.DA - 429lm Black / Matt Gold
-  03.8825.40.DA - 423lm White / Black
-  03.8825.14.DA - 423lm Black / Black

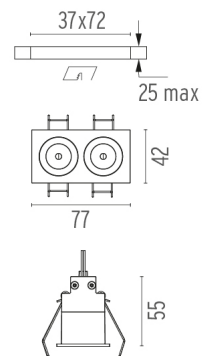

CERTIFICATIONS

