

LIGHT SHADOW FIXED TRIM DALI VERSION 12 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Length (mm)	427
Recessed depth (mm)	75
Weight (kg)	0,66





Light Shadow Fixed Trim Dali Version 12 Spots Optic Spot



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.8848.40.DA - 2593lm White / White
- 03.8848.14.DA - 2593lm Black / White
- ◐ 03.8850.40.DA - 2612lm White / Chrome
- ◑ 03.8850.14.DA - 2612lm Black / Chrome
- ◒ 03.8851.40.DA - 2573lm White / Matt Gold
- ◓ 03.8851.14.DA - 2573lm Black / Matt Gold
- ◔ 03.8849.40.DA - 2539lm White / Black
- ◕ 03.8849.14.DA - 2539lm Black / Black

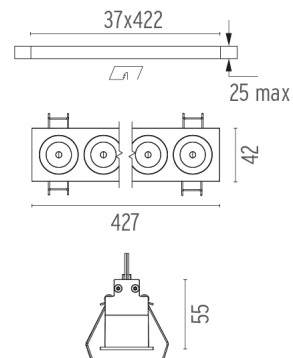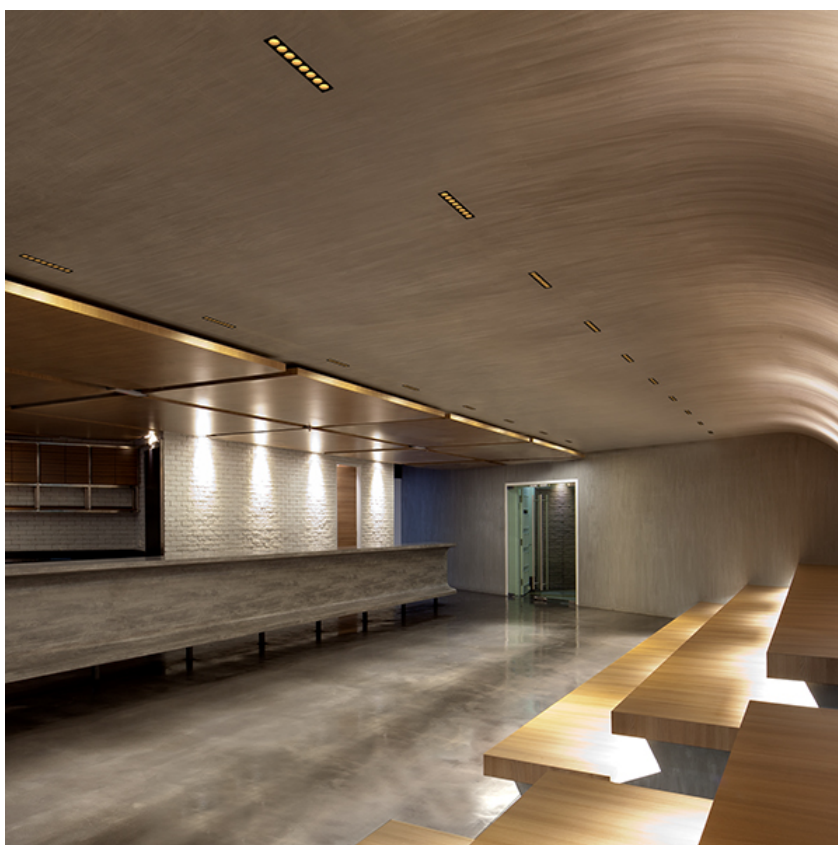

CERTIFICATIONS

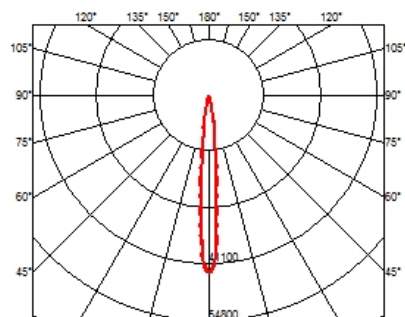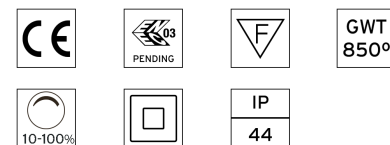

Light Shadow Fixed Trim Dali Version 12 Spots Optic Spot . Lamps



Power LED

Lamp category:
LED

Socket:
Special base









Lamp type:
Power LED




Light Shadow Fixed Trim Dali Version 12 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

-  03.8848.40.DA - 2593lm White / White
-  03.8848.14.DA - 2593lm Black / White
-  03.8850.40.DA - 2612lm White / Chrome
-  03.8850.14.DA - 2612lm Black / Chrome
-  03.8851.40.DA - 2573lm White / Matt Gold
-  03.8851.14.DA - 2573lm Black / Matt Gold
-  03.8849.40.DA - 2539lm White / Black
-  03.8849.14.DA - 2539lm Black / Black

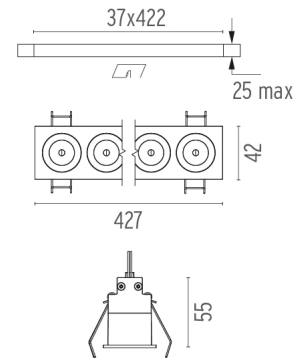

CERTIFICATIONS

