

LIGHT SHADOW FIXED NO TRIM DALI VERSION 4 SPOTS OPTIC SPOT

Mounting Ceiling recessed

Lamps descriptionPower LED 10,8W 1040 lm 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 10° Spot

ELECTRICAL


Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

PHYSICAL

Length (mm) 140
Recessed depth (mm) 75
Weight (kg) 0,34

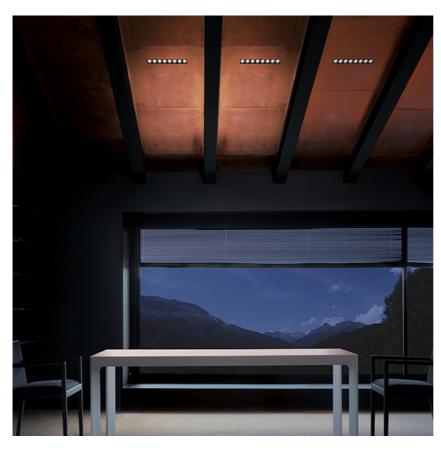




Light Shadow Fixed No Trim Dali Version 4 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.





CERTIFICATIONS




















Light Shadow Fixed No Trim Dali Version 4 Spots Optic Spot . Accessories

Mounting





08.0511.00

08.0052.90

Pre-installation frame. Fixed No Trim 4L

Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.

Light Shadow Fixed No Trim Dali Version 4 Spots Optic Spot . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Fixed No Trim Dali Version 4 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

03.8860.40.DA - 810lm White / White 03.8860.14.DA - 810lm Black / White 03.8862.40.DA - 816lm White / Chrome 03.8862.14.DA - 816lm Black / Chrome White / Matt Gold 03.8863.40.DA - 804lm 03.8863.14.DA - 804lm Black / Matt Gold ■ 03.8861.40.DA - 793lm White / Black 03.8861.14.DA - 793lm Black / Black



CERTIFICATIONS















