

LIGHT SHADOW FIXED NO TRIM DALI VERSION 8 SPOTS OPTIC SPOT

Mounting Ceiling recessed

Lamps descriptionPower LED 21,6W 2080 Im 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 10° Spot

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali


Emergency Without Insulation class Class II

PHYSICAL

 Length (mm)
 280

 Recessed depth (mm)
 75

 Weight (kg)
 0,50

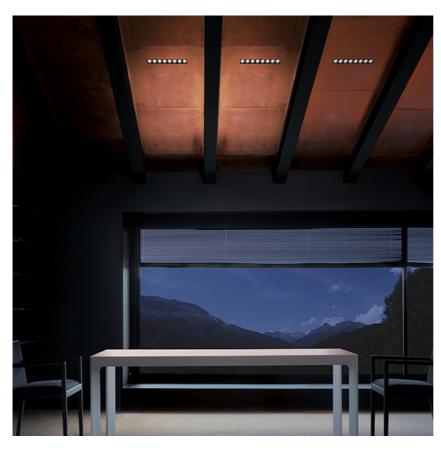




Light Shadow Fixed No Trim Dali Version 8 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.





CERTIFICATIONS




















Light Shadow Fixed No Trim Dali Version 8 Spots Optic Spot . Accessories

Mounting





08.0512.00

08.0052.90

Pre-installation frame. Fixed No Trim 8L

Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.

Light Shadow Fixed No Trim Dali Version 8 Spots Optic Spot . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Light Shadow Fixed No Trim Dali Version 8 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.8868.40.DA - 1620lm White / White

03.8868.14.DA - 1620lm Black / White

03.8870.40.DA - 1631lm White / Chrome


03.8870.14.DA - 1631lm Black / Chrome

03.8871.40.DA - 1607lm White / Matt Gold

03.8871.14.DA - 1607lm Black / Matt Gold

03.8869.40.DA - 1586lm White / Black

03.8869.14.DA - 1586lm Black / Black



CERTIFICATIONS















