

## LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 8 SPOTS OPTIC SPOT

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 21,6W 2080 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame not required.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	10° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,50





**Light Shadow Adjustable Trim Dali Version 8 Spots Optic Spot**



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.8900.40.DA - 1620lm White / White
- 03.8900.14.DA - 1620lm Black / White
- ◐ 03.8902.40.DA - 1631lm White / Chrome
- ◑ 03.8902.14.DA - 1631lm Black / Chrome
- ◒ 03.8903.40.DA - 1607lm White / Matt Gold
- ◓ 03.8903.14.DA - 1607lm Black / Matt Gold
- ◔ 03.8901.40.DA - 1586lm White / Black
- ◕ 03.8901.14.DA - 1586lm Black / Black

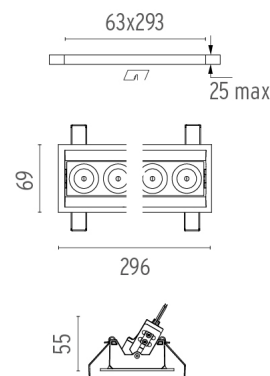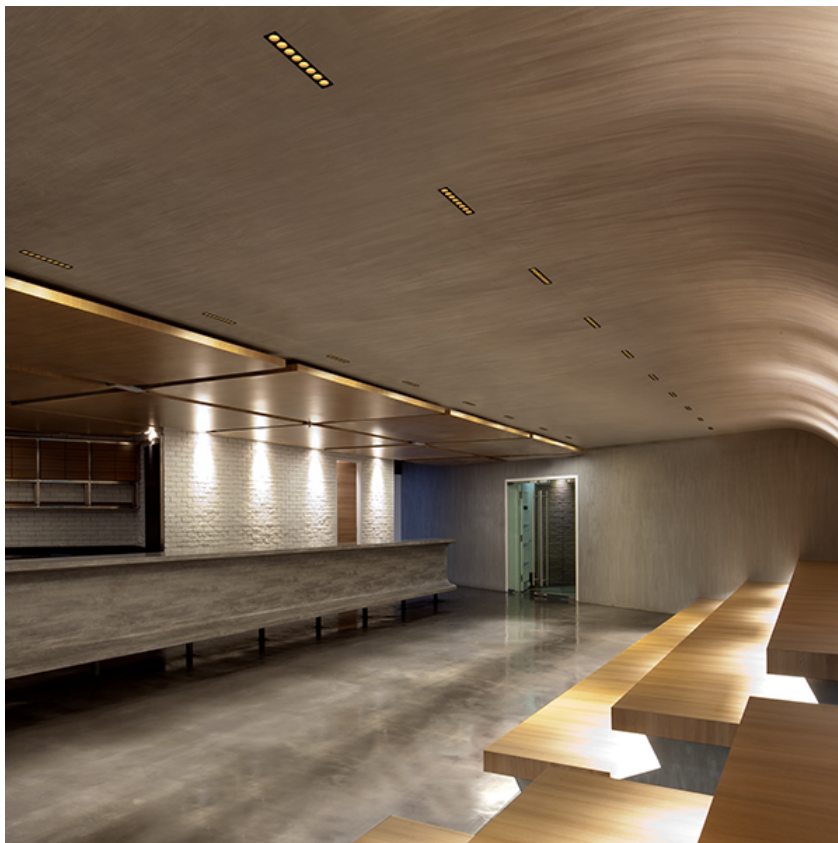

### CERTIFICATIONS

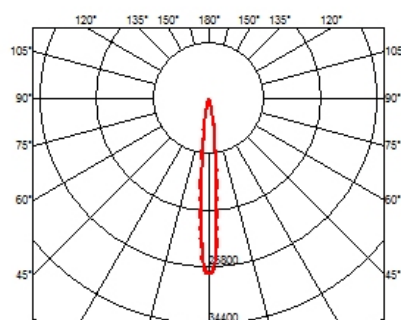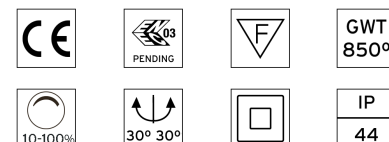

## Light Shadow Adjustable Trim Dali Version 8 Spots Optic Spot . Lamps



**Power LED**

**Lamp category:**  
LED







**Socket:**  
Special base


**Lamp type:**  
Power LED



**Light Shadow Adjustable Trim  
Dali Version 8 Spots Optic Spot**  
designed by FLOS Architectural

Recessed integrated luminaire with 8  
LED lighting spots. Remote power  
supply included.

-  03.8900.40.DA - 1620lm White / White
-  03.8900.14.DA - 1620lm Black / White
-  03.8902.40.DA - 1631lm White / Chrome
-  03.8902.14.DA - 1631lm Black / Chrome
-  03.8903.40.DA - 1607lm White / Matt Gold
-  03.8903.14.DA - 1607lm Black / Matt Gold
-  03.8901.40.DA - 1586lm White / Black
-  03.8901.14.DA - 1586lm Black / Black

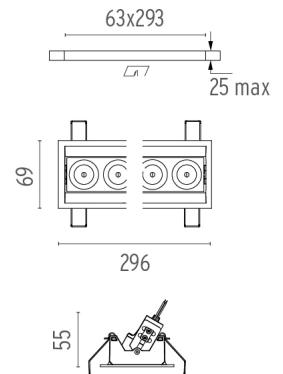

### CERTIFICATIONS

