

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 8 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2240 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50





Light Shadow Adjustable Trim Dali Version 8 Spots Optic Spot



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.8904.40.DA - 1729lm White / White
- 03.8904.14.DA - 1729lm Black / White
- ◐ 03.8906.40.DA - 1741lm White / Chrome
- ◑ 03.8906.14.DA - 1741lm Black / Chrome
- ◒ 03.8907.40.DA - 1715lm White / Matt Gold
- ◓ 03.8907.14.DA - 1715lm Black / Matt Gold
- ◔ 03.8905.40.DA - 1692lm White / Black
- ◕ 03.8905.14.DA - 1692lm Black / Black

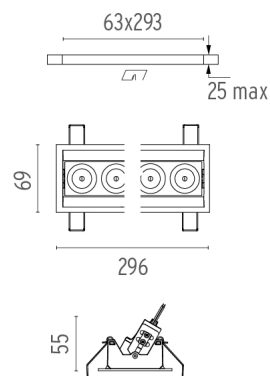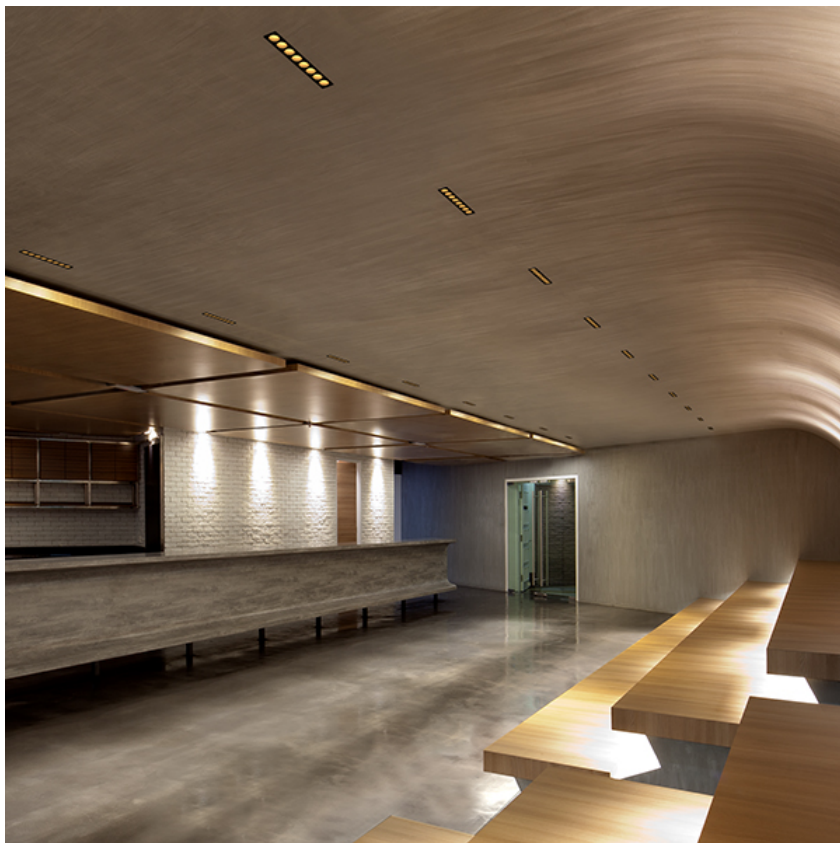

CERTIFICATIONS

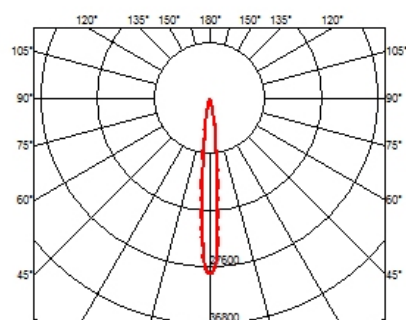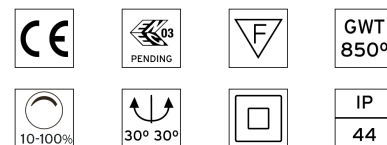

Light Shadow Adjustable Trim Dali Version 8 Spots Optic Spot . Lamps



Power LED

Lamp category:
LED









Socket:
Special base


Lamp type:
Power LED



Light Shadow Adjustable Trim Dali Version 8 Spots Optic Spot
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

-  03.8904.40.DA - 1729lm White / White
-  03.8904.14.DA - 1729lm Black / White
-  03.8906.40.DA - 1741lm White / Chrome
-  03.8906.14.DA - 1741lm Black / Chrome
-  03.8907.40.DA - 1715lm White / Matt Gold
-  03.8907.14.DA - 1715lm Black / Matt Gold
-  03.8905.40.DA - 1692lm White / Black
-  03.8905.14.DA - 1692lm Black / Black

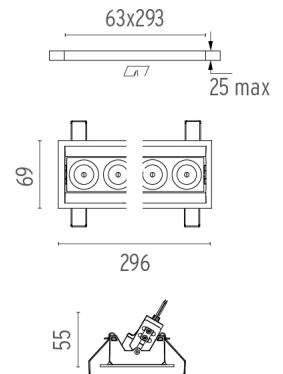

CERTIFICATIONS

