

LIGHT SHADOW ADJUSTABLE NO TRIM DALI VERSION 4 SPOTS OPTIC SPOT

Mounting Ceiling recessed

Lamps descriptionPower LED 10,8W 1120 lm 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 10° Spot

ELECTRICAL


Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

PHYSICAL

Recessed depth (mm) 75 Weight (kg) 0,34

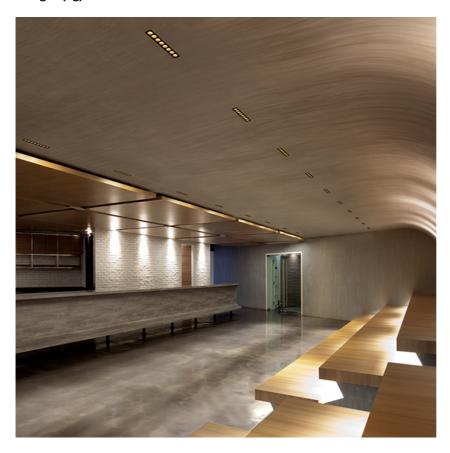




Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

03.8928.40.DA - 864lm White / White 03.8928.14.DA - 864lm Black / White ■ 03.8930.40.DA - 871Im White / Chrome 03.8930.14.DA - 871lm Black / Chrome 03.8931.40.DA - 858lm White / Matt Gold 03.8931.14.DA - 858lm Black / Matt Gold ● 03.8929.40.DA - 846lm White / Black 03.8929.14.DA - 846lm Black / Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Spot . Accessories

Mounting





08.0516.00

08.0059.90

Pre-installation frame. Adjustable No Trim 4L Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.

Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Spot . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

03.8928.40.DA - 864lm White / White 03.8928.14.DA - 864lm Black / White 03.8930.40.DA - 871lm White / Chrome 03.8930.14.DA - 871lm Black / Chrome 03.893 I .40.DA - 858lm White / Matt Gold 03.8931.14.DA - 858lm Black / Matt Gold ■ 03.8929.40.DA - 846lm White / Black 03.8929.14.DA - 846lm Black / Black



CERTIFICATIONS

















