


## LIGHT SHADOW OPTIC SPOT DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Power LED 10,8W 4 x 260 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	Installation frame not required.

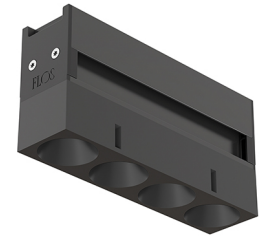

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	10° Spot

**Light Shadow Optic Spot Dali Version**  
designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.


### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III



- 03.8949.40.DA - 793lm White / Black
- 03.8949.14.DA - 793lm Black / Black
- 03.8948.40.DA - 810lm White / White
- 03.8948.14.DA - 810lm Black / White
- 03.8950.40.DA - 816lm White / Chrome
- 03.8950.14.DA - 816lm Black / Chrome
- 03.8951.40.DA - 804lm White / Matt Gold
- 03.8951.14.DA - 804lm Black / Matt Gold

### PHYSICAL

<b>Weight (kg)</b>	0,34
--------------------	------

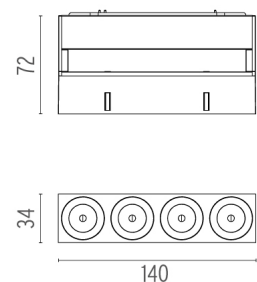

### CERTIFICATIONS

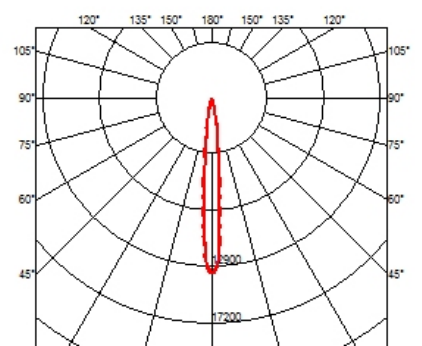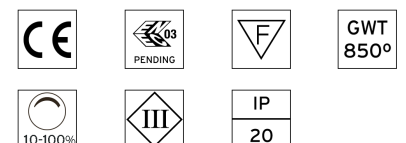

## Light Shadow Optic Spot Dali Version . Lamps




**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base



**Lamp type:**  
Power LED

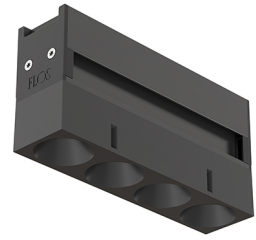

**Light Shadow Optic Spot Dali Version**  
designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

- 03.8949.40.DA - 793lm White / Black
- 03.8949.14.DA - 793lm Black / Black
- 03.8948.40.DA - 810lm White / White
- 03.8948.14.DA - 810lm Black / White
- ◐ 03.8950.40.DA - 816lm White / Chrome
- ◑ 03.8950.14.DA - 816lm Black / Chrome
- ◐ 03.8951.40.DA - 804lm White / Matt Gold
- ◑ 03.8951.14.DA - 804lm Black / Matt Gold

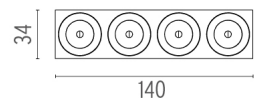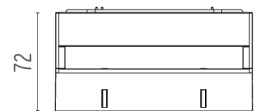

**CERTIFICATIONS**

