

LIGHT SHADOW FIXED TRIM DALI VERSION 2 SPOTS OPTIC MEDIUM

Mounting Ceiling recessed

Lamps descriptionPower LED 5,4W 520 Im 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes Pre-installation frame not required.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 23° Medium

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali


Emergency Without Insulation class Class II

PHYSICAL

 Length (mm)
 77

 Recessed depth (mm)
 75

 Weight (kg)
 0,25

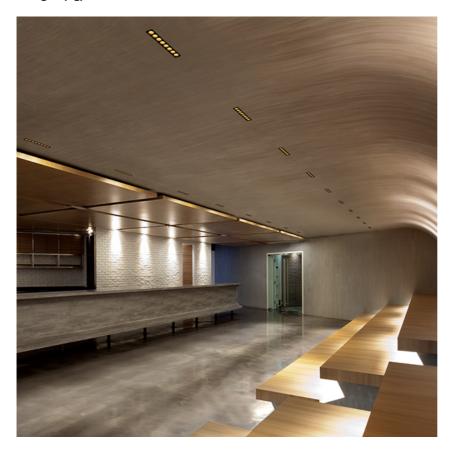




Light Shadow Fixed Trim Dali Version 2 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

03.9100.40.DA - 395lm	White / White
03.9100.14.DA - 395lm	Black / White
03.9102.40.DA - 400lm	White / Chrome
03.9102.14.DA - 400lm	Black / Chrome
03.9103.40.DA - 393lm	White / Matt Gold
03.9103.14.DA - 393lm	Black / Matt Gold
● 03.9101.40.DA - 388lm	White / Black
03.9101.14.DA - 388lm	Black / Black



CERTIFICATIONS




















Light Shadow Fixed Trim Dali Version 2 Spots Optic Medium . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Fixed Trim Dali Version 2 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

03.9100.40.DA - 395lm White / White 03.9100.14.DA - 395lm Black / White a 03.9102.40.DA - 400lm White / Chrome 03.9102.14.DA - 400lm Black / Chrome 03.9103.40.DA - 393lm White / Matt Gold 03.9103.14.DA - 393lm Black / Matt Gold **▲** 03.9101.40.DA - 388lm White / Black 03.9101.14.DA - 388lm Black / Black



CERTIFICATIONS















