

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 2 SPOTS OPTIC MEDIUM

Mounting	Ceiling recessed
Lamps description	Power LED 5,4W 520 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,25




Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium



designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.9300.40.DA - 395lm White / White
- 03.9300.14.DA - 395lm Black / White
- ◐ 03.9302.40.DA - 400lm White / Chrome
- ◑ 03.9302.14.DA - 400lm Black / Chrome
- ◒ 03.9303.40.DA - 393lm White / Matt Gold
- ◓ 03.9303.14.DA - 393lm Black / Matt Gold
- ◔ 03.9301.40.DA - 388lm White / Black
- ◕ 03.9301.14.DA - 388lm Black / Black

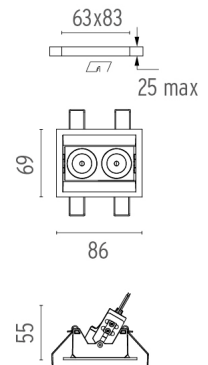

CERTIFICATIONS

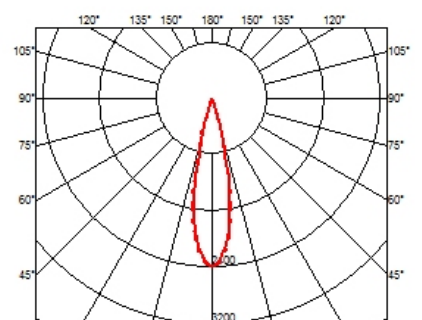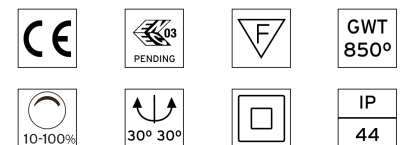

Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

-  03.9300.40.DA - 395lm White / White
-  03.9300.14.DA - 395lm Black / White
-  03.9302.40.DA - 400lm White / Chrome
-  03.9302.14.DA - 400lm Black / Chrome
-  03.9303.40.DA - 393lm White / Matt Gold
-  03.9303.14.DA - 393lm Black / Matt Gold
-  03.9301.40.DA - 388lm White / Black
-  03.9301.14.DA - 388lm Black / Black

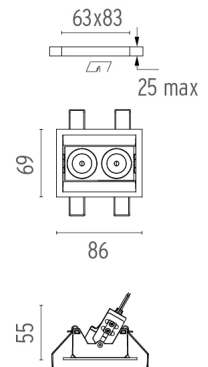

CERTIFICATIONS

