

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 2 SPOTS OPTIC MEDIUM

Mounting	Ceiling recessed
Lamps description	Power LED 5,4W 560 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,25





Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium



designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.9310.40.DA - 421lm White / White
- 03.9310.14.DA - 421lm Black / White
- ◐ 03.9312.40.DA - 427lm White / Chrome
- ◑ 03.9312.14.DA - 427lm Black / Chrome
- ◒ 03.9313.40.DA - 419lm White / Matt Gold
- ◓ 03.9313.14.DA - 419lm Black / Matt Gold
- ◔ 03.9311.40.DA - 414lm White / Black
- ◕ 03.9311.14.DA - 414lm Black / Black

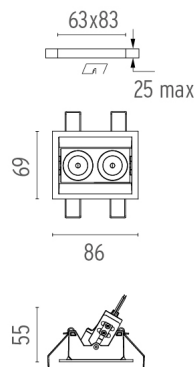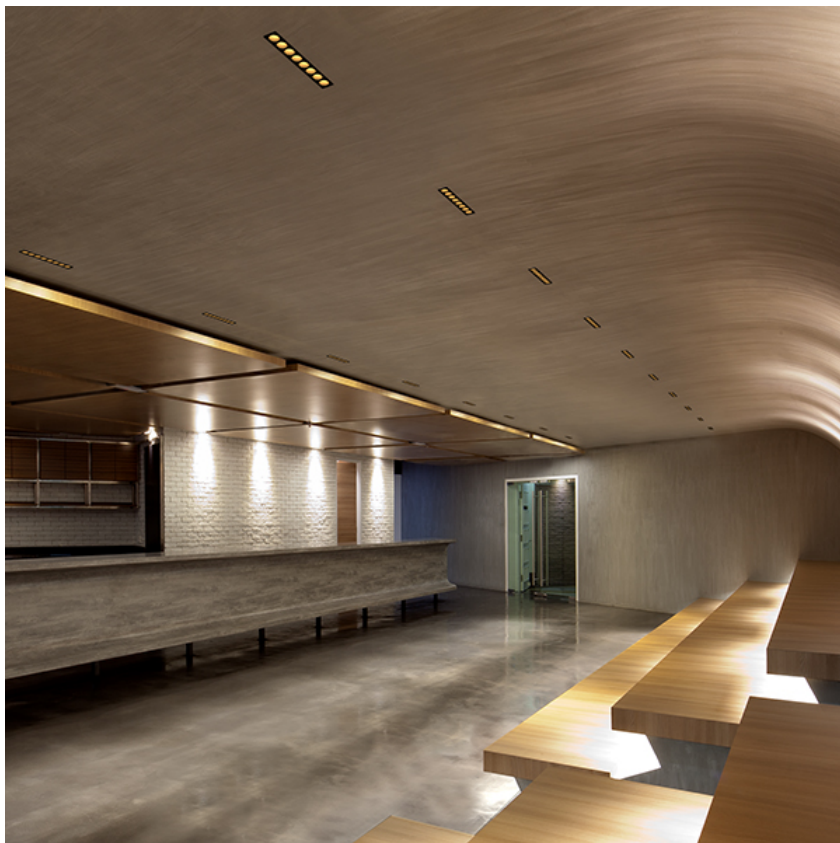

CERTIFICATIONS

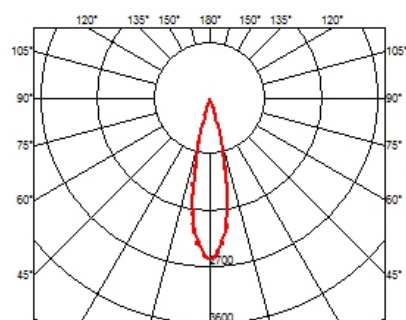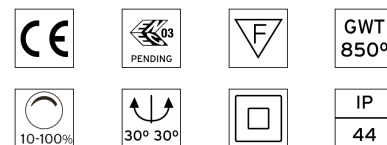

Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium . Lamps



Power LED

Lamp category:
LED

Socket:
Special base









Lamp type:
Power LED




Light Shadow Adjustable Trim Dali Version 2 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

-  03.9310.40.DA - 421lm White / White
-  03.9310.14.DA - 421lm Black / White
-  03.9312.40.DA - 427lm White / Chrome
-  03.9312.14.DA - 427lm Black / Chrome
-  03.9313.40.DA - 419lm White / Matt Gold
-  03.9313.14.DA - 419lm Black / Matt Gold
-  03.9311.40.DA - 414lm White / Black
-  03.9311.14.DA - 414lm Black / Black

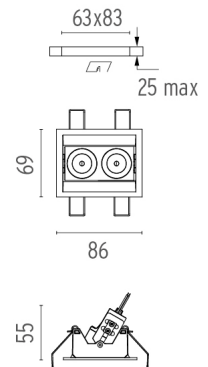

CERTIFICATIONS

