

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 4 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 10,8W 1040 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,34





Light Shadow Adjustable Trim Dali Version 4 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

- 03.9325.40.DA - 788lm White / White
- 03.9325.14.DA - 788lm Black / White
- ◐ 03.9327.40.DA - 806lm White / Chrome
- ◑ 03.9327.14.DA - 806lm Black / Chrome
- ◒ 03.9328.40.DA - 781lm White / Matt Gold
- ◓ 03.9328.14.DA - 781lm Black / Matt Gold
- ◔ 03.9326.40.DA - 765lm White / Black
- ◕ 03.9326.14.DA - 765lm Black / Black

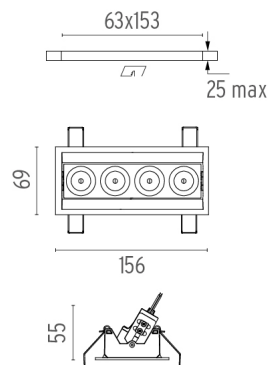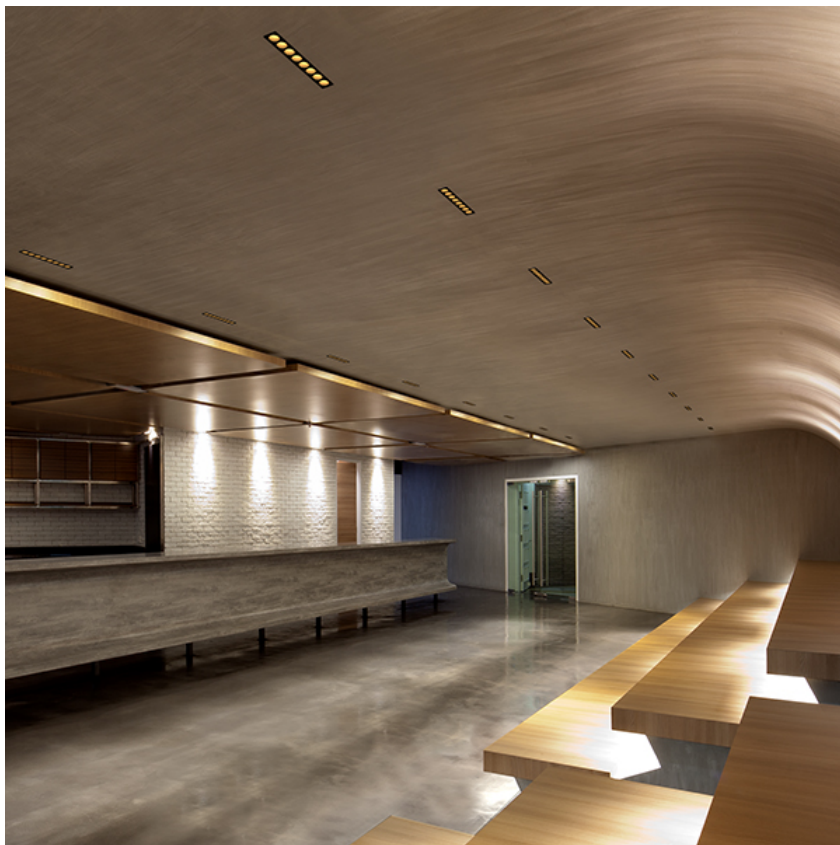

CERTIFICATIONS

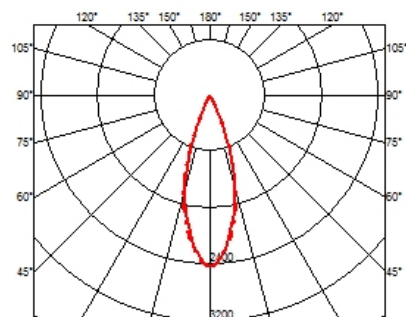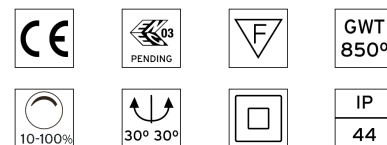

Light Shadow Adjustable Trim Dali Version 4 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base









Lamp type:
Power LED




Light Shadow Adjustable Trim Dali Version 4 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 4
LED lighting spots. Remote power supply
included.

-  03.9325.40.DA - 788lm White / White
-  03.9325.14.DA - 788lm Black / White
-  03.9327.40.DA - 806lm White / Chrome
-  03.9327.14.DA - 806lm Black / Chrome
-  03.9328.40.DA - 781lm White / Matt Gold
-  03.9328.14.DA - 781lm Black / Matt Gold
-  03.9326.40.DA - 765lm White / Black
-  03.9326.14.DA - 765lm Black / Black

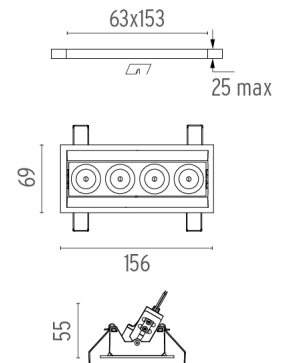

CERTIFICATIONS

