

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 4 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 10,8W 1120 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,34





Light Shadow Adjustable Trim Dali Version 4 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

- 03.9335.40.DA - 841lm White / White
- 03.9335.14.DA - 841lm Black / White
- ◐ 03.9337.40.DA - 860lm White / Chrome
- ◑ 03.9337.14.DA - 860lm Black / Chrome
- ◒ 03.9338.40.DA - 833lm White / Matt Gold
- ◓ 03.9338.14.DA - 833lm Black / Matt Gold
- ◔ 03.9336.40.DA - 817lm White / Black
- ◕ 03.9336.14.DA - 817lm Black / Black

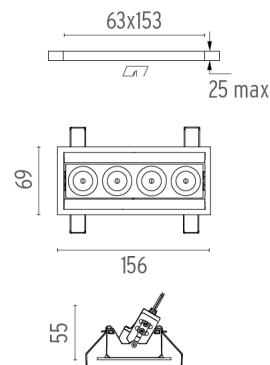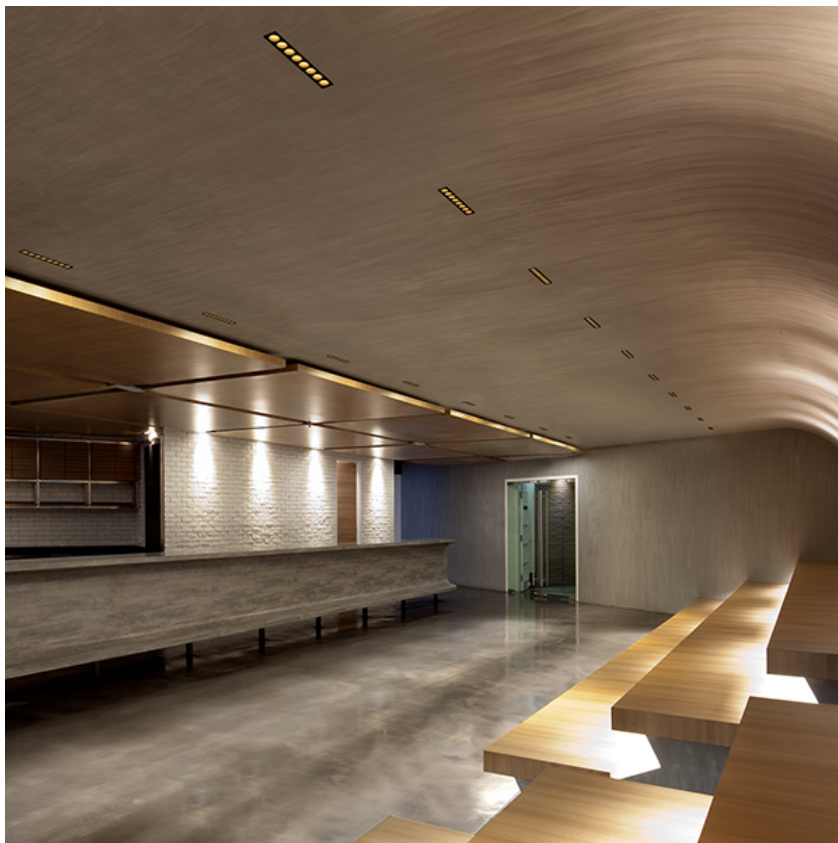

CERTIFICATIONS

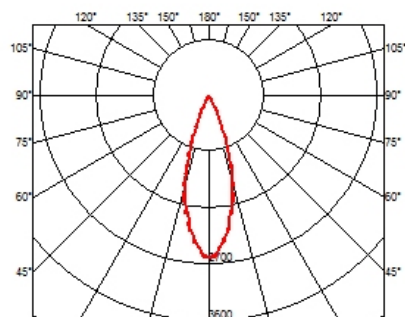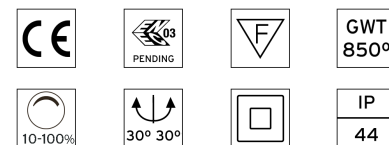

Light Shadow Adjustable Trim Dali Version 4 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base








Lamp type:
Power LED




**Light Shadow Adjustable Trim
Dali Version 4 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 4
LED lighting spots. Remote power
supply included.

-  03.9335.40.DA - 841lm White / White
-  03.9335.14.DA - 841lm Black / White
-  03.9337.40.DA - 860lm White / Chrome
-  03.9337.14.DA - 860lm Black / Chrome
-  03.9338.40.DA - 833lm White / Matt Gold
-  03.9338.14.DA - 833lm Black / Matt Gold
-  03.9336.40.DA - 817lm White / Black
-  03.9336.14.DA - 817lm Black / Black

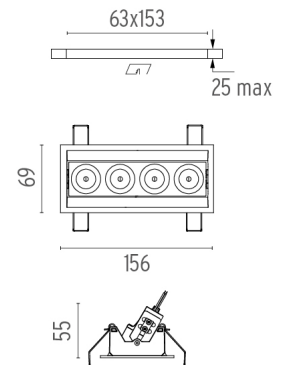

CERTIFICATIONS

