

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 8 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2080 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50





Light Shadow Adjustable Trim Dali Version 8 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9345.40.DA - 1576lm White / White
- 03.9345.14.DA - 1576lm Black / White
- ◐ 03.9347.40.DA - 1611lm White / Chrome
- ◑ 03.9347.14.DA - 1611lm Black / Chrome
- ◒ 03.9348.40.DA - 1562lm White / Matt Gold
- ◓ 03.9348.14.DA - 1562lm Black / Matt Gold
- ◔ 03.9346.40.DA - 1531lm White / Black
- ◕ 03.9346.14.DA - 1531lm Black / Black

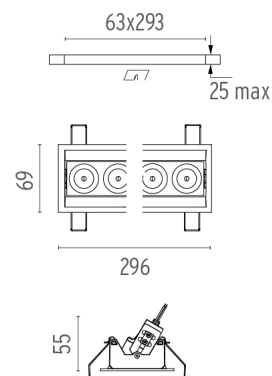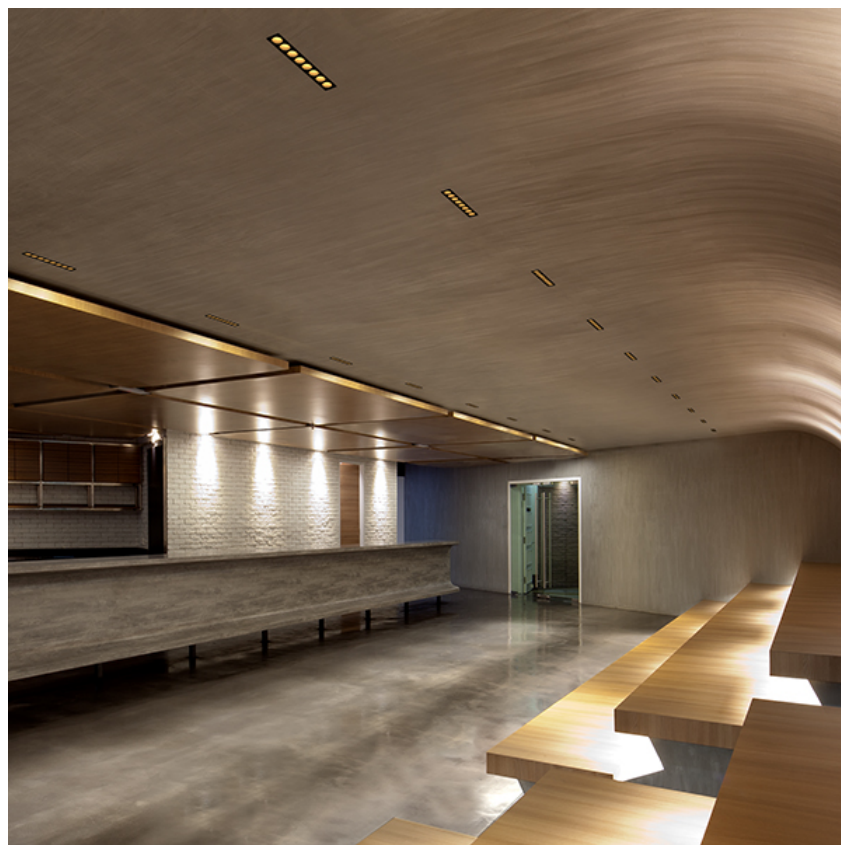

CERTIFICATIONS

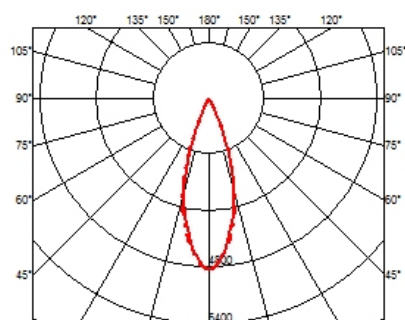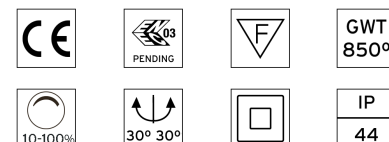

Light Shadow Adjustable Trim Dali Version 8 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base









Lamp type:
Power LED




**Light Shadow Adjustable Trim
Dali Version 8 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

-  03.9345.40.DA - 1576lm White / White
-  03.9345.14.DA - 1576lm Black / White
-  03.9347.40.DA - 1611lm White / Chrome
-  03.9347.14.DA - 1611lm Black / Chrome
-  03.9348.40.DA - 1562lm White / Matt Gold
-  03.9348.14.DA - 1562lm Black / Matt Gold
-  03.9346.40.DA - 1531lm White / Black
-  03.9346.14.DA - 1531lm Black / Black

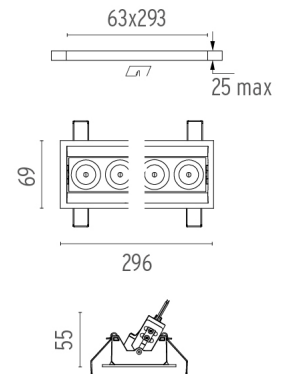

CERTIFICATIONS

