

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 12 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3120 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,66





**Light Shadow Adjustable Trim
Dali Version 12 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9365.40.DA - 2364lm White / White
- 03.9365.14.DA - 2364lm Black / White
- 03.9367.40.DA - 2417lm White / Chrome
- 03.9367.14.DA - 2417lm Black / Chrome
- 03.9368.40.DA - 2343lm White / Matt Gold
- 03.9368.14.DA - 2343lm Black / Matt Gold
- 03.9366.40.DA - 2296lm White / Black
- 03.9366.14.DA - 2296lm Black / Black

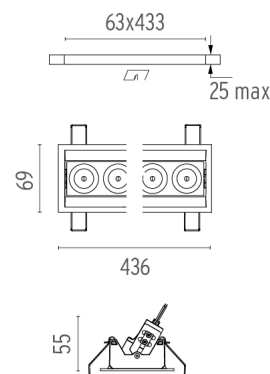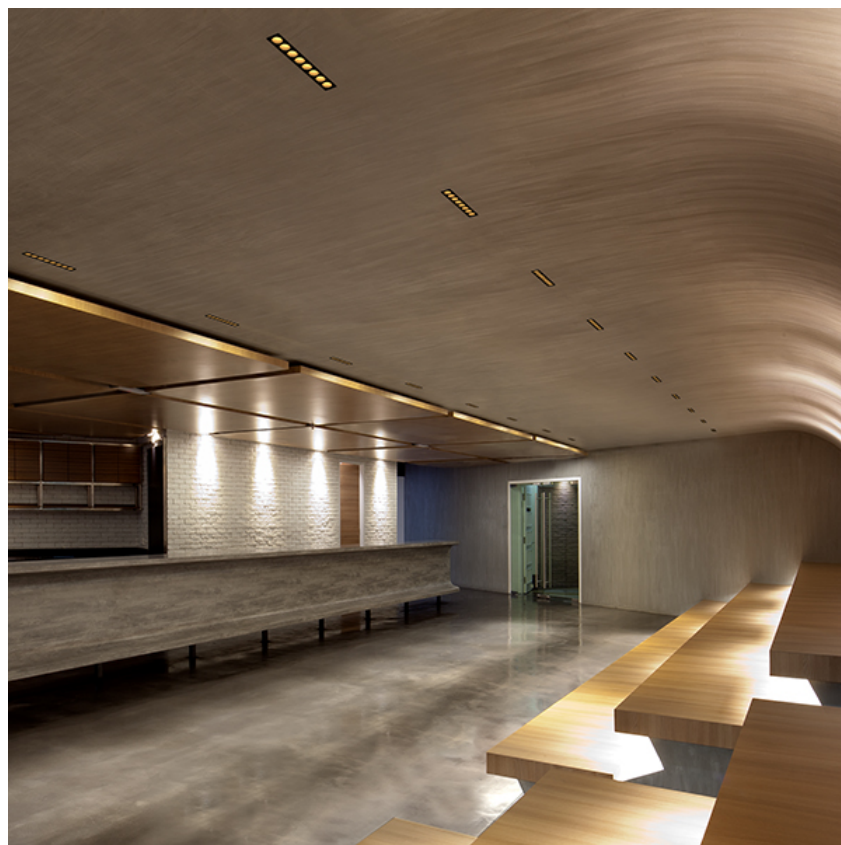

CERTIFICATIONS

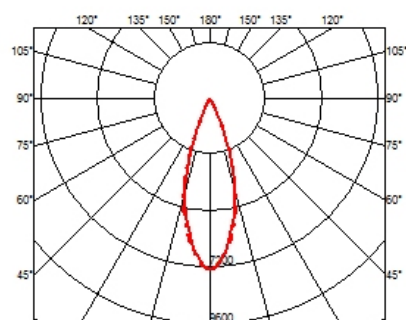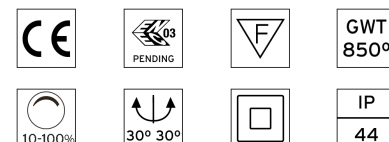

Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9365.40.DA - 2364lm White / White
- 03.9365.14.DA - 2364lm Black / White
- 03.9367.40.DA - 2417lm White / Chrome
- 03.9367.14.DA - 2417lm Black / Chrome
- 03.9368.40.DA - 2343lm White / Matt Gold
- 03.9368.14.DA - 2343lm Black / Matt Gold
- 03.9366.40.DA - 2296lm White / Black
- 03.9366.14.DA - 2296lm Black / Black

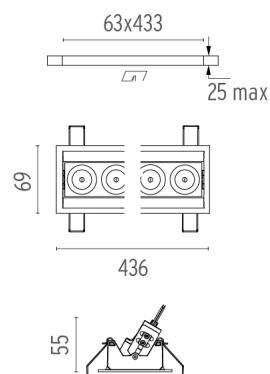

CERTIFICATIONS

