

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 12 SPOTS OPTIC MEDIUM

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,66





Light Shadow Adjustable Trim Dali Version 12 Spots Optic Medium



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.9370.40.DA - 2528lm White / White
- 03.9370.14.DA - 2528lm Black / White
- ◐ 03.9372.40.DA - 2564lm White / Chrome
- ◑ 03.9372.14.DA - 2564lm Black / Chrome
- ◒ 03.9373.40.DA - 2517lm White / Matt Gold
- ◓ 03.9373.14.DA - 2517lm Black / Matt Gold
- ◔ 03.9371.40.DA - 2484lm White / Black
- ◕ 03.9371.14.DA - 2484lm Black / Black

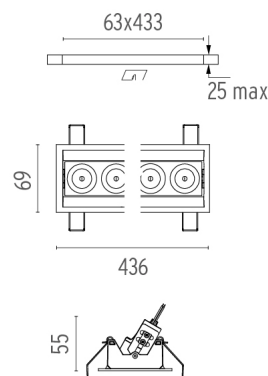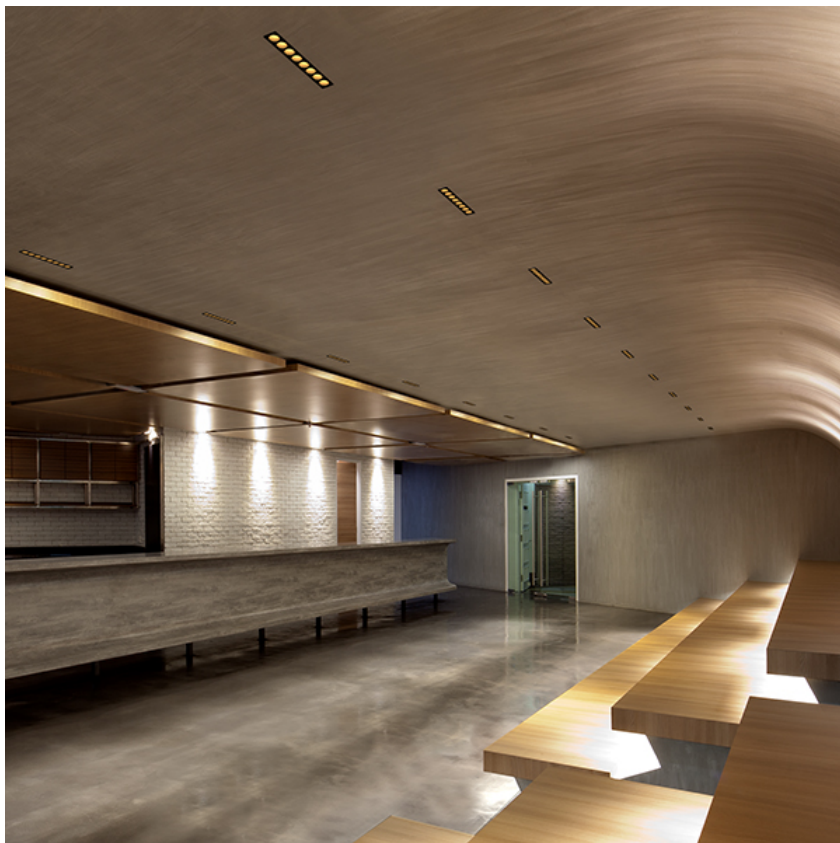

CERTIFICATIONS

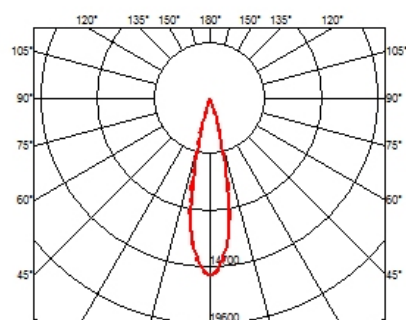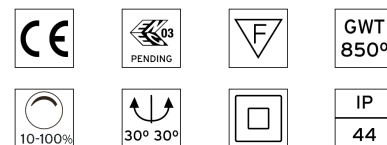

Light Shadow Adjustable Trim Dali Version 12 Spots Optic Medium . Lamps



Power LED

Lamp category:
LED

Socket:
Special base









Lamp type:
Power LED




**Light Shadow Adjustable Trim Dali
Version 12 Spots Optic Medium**

designed by FLOS Architectural

Recessed integrated luminaire with 12
LED lighting spots. Remote power
supply included.

-  03.9370.40.DA - 2528lm White / White
-  03.9370.14.DA - 2528lm Black / White
-  03.9372.40.DA - 2564lm White / Chrome
-  03.9372.14.DA - 2564lm Black / Chrome
-  03.9373.40.DA - 2517lm White / Matt Gold
-  03.9373.14.DA - 2517lm Black / Matt Gold
-  03.9371.40.DA - 2484lm White / Black
-  03.9371.14.DA - 2484lm Black / Black

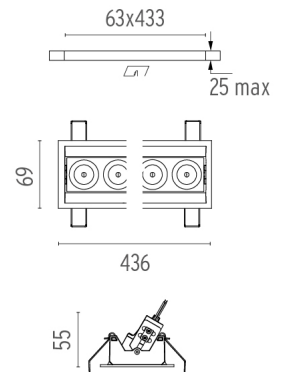

CERTIFICATIONS

