


LIGHT SHADOW OPTIC FLOOD DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED 10,8W 4 x 280 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	24
Environment	Indoor
Notes	Installation frame not required.

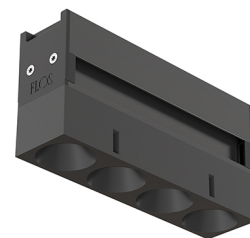

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	33° Flood

Light Shadow Optic Flood Dali Version
designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.



ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class III



- 03.9636.40.DA - 817lm White / Black
- 03.9636.14.DA - 817lm Black / Black
- 03.9635.40.DA - 841lm White / White
- 03.9635.14.DA - 841lm Black / White
- 03.9637.40.DA - 860lm White / Chrome
- 03.9637.14.DA - 860lm Black / Chrome
- 03.9638.40.DA - 833lm White / Matt Gold
- 03.9638.14.DA - 833lm Black / Matt Gold

PHYSICAL

Weight (kg)	0,34
--------------------	------



CERTIFICATIONS

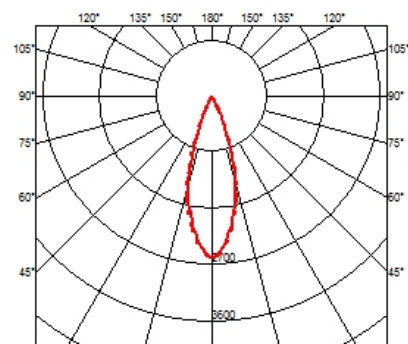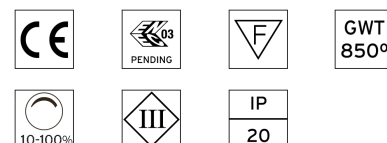

Light Shadow Optic Flood Dali Version . Lamps




Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED

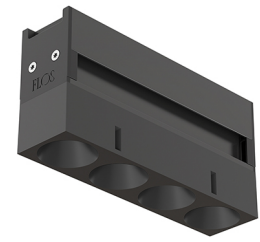

Light Shadow Optic Flood Dali Version
designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

- 03.9636.40.DA - 817lm White / Black
- 03.9636.14.DA - 817lm Black / Black
- 03.9635.40.DA - 841lm White / White
- 03.9635.14.DA - 841lm Black / White
- 03.9637.40.DA - 860lm White / Chrome
- 03.9637.14.DA - 860lm Black / Chrome
- 03.9638.40.DA - 833lm White / Matt Gold
- 03.9638.14.DA - 833lm Black / Matt Gold

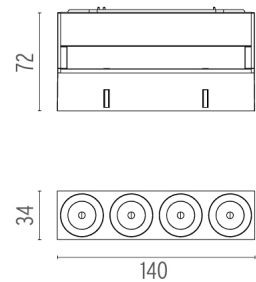

CERTIFICATIONS

