FLOS

NEUTRON I FIXED SQUARE FLOOR

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment I Floor recessed Phosphor LED 8,2W 965 Im 3000K CRI 80 See reference number 220/240 Indoor, Outdoor

OPTICAL


Light controller description	Metalized aluminum
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	39°

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Length (mm)	125
Width (mm)	125
Recessed depth (mm)	120
Construction material	Stainless steel
Weight (kg)	1.20

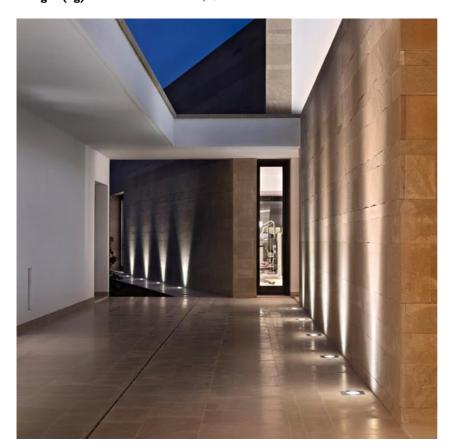

Included

Remote

Electronic


Without Class II



Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Phosphor LED module integrated. Remote electronic driver 220/240V included. Watertight connection device included.

07.9501.04B - 639lm	Matt black
07.9501.72B - 639lm	Grey
🔵 07.9501.55B - 639lm	Stainless steel
07.9501.PNB - 639lm	Stainless steel black
07.9501.PBB - 639lm	Stainless steel bruno
07.9501.PGB - 639 lm	Stainless steel gold



CERTIFICATIONS

FLOS

Neutron I Fixed Square Floor . Accessories

Electrical





Junction box

IP67 waterproof junction box: to be used for electrical connections.

Mounting





07.9260.00

Recessed supports


Housing for installation in paved grounds made of thermoplastic material.




Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Phosphor LED module integrated. Remote electronic driver 220/240V included. Watertight connection device included.

07.9501.04B - 639lm	Matt black
07.9501.72B - 639lm	Grey
🔵 07.9501.55B - 639lm	Stainless steel
07.9501.PNB - 639lm	Stainless steel black
07.9501.PBB - 639lm	Stainless steel bruno
🛑 07.9501.PGB - 639lm	Stainless steel gold



CERTIFICATIONS



F

Neutron I Fixed Square Floor . Lamps




Phosphor LED Lamp category: LED Lamp type: Phosphor LED



Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Phosphor LED module integrated. Remote electronic driver 220/240V included. Watertight connection device included.

_	
07.9501.04B - 639lm	Matt black
07.9501.72B - 639lm	Grey
🔵 07.9501.55B - 639lm	Stainless steel
07.9501.PNB - 639 lm	Stainless steel black
07.9501.PBB - 639lm	Stainless steel bruno
🛑 07.9501.PGB - 639lm	Stainless steel gold



CERTIFICATIONS (T°) 65°C CE **K**03 F GWT



850°