

NEUTRON I FIXED ROUND FLOOR

Number of heads

Mounting Floor recessed

Lamps description Power LED 7W 720 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 100/240

Environment Indoor, Outdoor

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 37° Flood

ELECTRICAL


Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Diameter (mm) 125 Recessed depth (mm) 120

Construction material Stainless steel

Weight (kg) 1,10

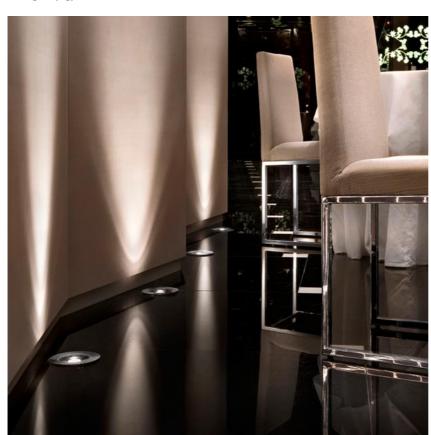



Neutron I Fixed Round Floor

designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 100/240V integrated. Watertight connection device included.

 07.9520.04B - 262lm
 Matt black


 07.9520.72B - 262lm
 Grey

 07.9520.55B - 262lm
 Stainless steel

 07.9520.PNB - 262lm
 Stainless steel black

 07.9520.PBB - 262lm
 Stainless steel bruno

 07.9520.PGB - 262lm
 Stainless steel gold



CERTIFICATIONS











IP 67

Flos.architectural@flos.com www.flos.com



Neutron I Fixed Round Floor. Accessories

Electrical





Junction box

IP67 waterproof junction box: to be used for electrical connections.

Mounting





Recessed supports


Housing for installation in paved grounds made of thermoplastic material.



Neutron I Fixed Round Floor designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 100/240V integrated. Watertight connection device included.

07.9520.04B - 262lm	Matt black
07.9520.72B - 262lm	Grey
07.9520.55B - 262lm	Stainless steel
07.9520.PNB - 262lm	Stainless steel black
07.9520.PBB - 262lm	Stainless steel brund
07.9520.PGB - 262lm	Stainless steel gold



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com



Neutron I Fixed Round Floor . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Neutron I Fixed Round Floor designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 100/240V integrated. Watertight connection device included.

 07.9520.04B - 262lm
 Matt black


 07.9520.72B - 262lm
 Grey

 07.9520.55B - 262lm
 Stainless steel

 07.9520.PNB - 262lm
 Stainless steel black

 07.9520.PBB - 262lm
 Stainless steel bruno

 07.9520.PGB - 262lm
 Stainless steel gold



CERTIFICATIONS











IP 67

Flos.architectural@flos.com www.flos.com