

NEUTRON I FIXED SQUARE FLOOR

Number of heads

Mounting Floor recessed

Lamps description Power LED 7W 720 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240

Environment Indoor, Outdoor

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 37° Flood

ELECTRICAL

Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL


 Length (mm)
 125

 Width (mm)
 125

 Recessed depth (mm)
 120

Construction material Stainless steel

Weight (kg) 1,10

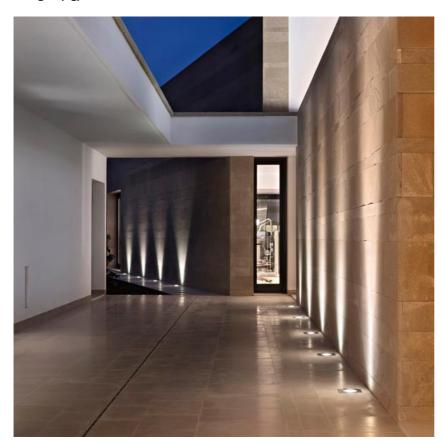




Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 220/240V integrated. Watertight connection device included.

07.9521.04B - 262lm Matt black
07.9521.72B - 262lm Grey
07.9521.55B - 262lm Stainless steel
07.9521.PNB - 262lm Stainless steel black
07.9521.PBB - 262lm Stainless steel bruno
07.9521.PGB - 262lm Stainless steel gold





CERTIFICATIONS













Flos.architectural@flos.com www.flos.com



Neutron I Fixed Square Floor. Accessories

Electrical





Junction box

IP67 waterproof junction box: to be used for electrical connections.

Mounting





Recessed supports


Housing for installation in paved grounds made of thermoplastic material.



Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 220/240V integrated. Watertight connection device included.

07.9521.04B - 262lm	Matt black
07.9521.72B - 262lm	Grey
07.9521.55B - 262lm	Stainless steel
07.9521.PNB - 262lm	Stainless steel black
07.9521.PBB - 262lm	Stainless steel brund
07.9521.PGB - 262lm	Stainless steel gold



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com



Neutron I Fixed Square Floor. Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



Neutron I Fixed Square Floor designed by Piero Lissoni

LED up-light. Cluster 7 LED module integrated. Electronic driver 220/240V integrated. Watertight connection device included.

07.9521.04B - 262lm
 07.9521.72B - 262lm
 07.9521.55B - 262lm
 07.9521.PNB - 262lm
 07.9521.PBB - 262lm
 07.9521.PBB - 262lm
 07.9521.PGB - 262lm
 Stainless steel bruno
 07.9521.PGB - 262lm
 Stainless steel gold



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com