

## LIGHT BELL DIMMABLE PUSH

<b>Number of heads</b>	1
<b>Mounting</b>	Pendant
<b>Lamps description</b>	LED Array 49,5W 5783 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Pin-block type dissipater.

## OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	37°, 46°, 78°

## ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable Push
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

## PHYSICAL


<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	Light Source: 3,81 / Reflectors: Aluminium 0,95 - Transparent 3,41 - Concrete 4





## Light Bell Dimmable Push designed by Piero Lissoni

Suspended luminaire for mounting on the ceiling with LED light source. (4 metres maximum distance to ceiling). Power supply source integrated into luminaire housing. Reflector not included; supplied separately.

- 07.9641.I4ADP.Light Source Black
- 07.9630.AP.Reflecto - (37°) 3026lm Polished aluminium / Anodized aluminium
- 07.9630.70.Reflector - (37°) 3026lm Matt White / Anodized aluminium
- 07.9630.AN.Reflector - (78°) 2635lm Anodized black / Gold
- 07.9630.MM.Reflector - (78°) 2635lm Dark brown / Gold
- 07.9630.7C.Reflector - (78°) 3117lm Matt Black / Galvanic Copper
- 07.9630.76.Reflector - (46°) 3391lm Transparent
- 07.9630.CE.Reflector Concrete

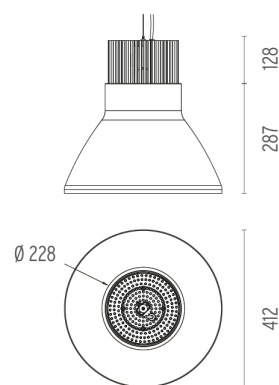

## CERTIFICATIONS

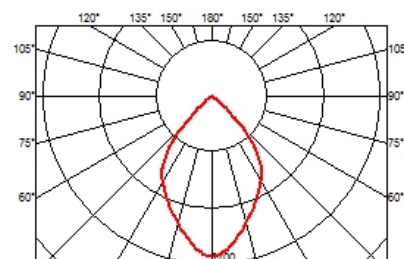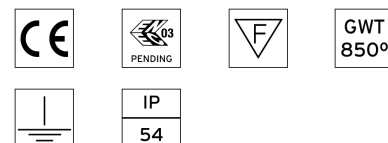

## Light Bell Dimmable Push . Accessories

### Electrical



● F0556020

**Power Supply Rose. Non Dimmable**

Rosette for indoors. IP20.



● F0557020

**Power supply rose. Dimmable Push/Dali**

Rosette for indoors. IP20.



● 08.8775.40

**Rosette IP54**

## Light Bell Dimmable Push . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**



LED Array



**Light Bell Dimmable Push**  
designed by Piero Lissoni

Suspended luminaire for mounting on the ceiling with LED light source. (4 metres maximum distance to ceiling). Power supply source integrated into luminaire housing. Reflector not included; supplied separately.

- 07.9641.I4ADP.Light Source Black
- 07.9630.AP.Reflecto - (37°) 3026lm Polished aluminium / Anodized aluminium
- 07.9630.70.Reflector - (37°) 3026lm Matt White / Anodized aluminium
- 07.9630.AN.Reflector - (78°) 2635lm Anodized black / Gold
- 07.9630.MM.Reflector - (78°) 2635lm Dark brown / Gold
- 07.9630.7C.Reflector - (78°) 3117lm Matt Black / Galvanic Copper
- 07.9630.76.Reflector - (46°) 3391lm Transparent
- 07.9630.CE.Reflector Concrete



### CERTIFICATIONS

