

## LIGHT BELL DIMMABLE DALI

<b>Number of heads</b>	1
<b>Mounting</b>	Pendant
<b>Lamps description</b>	LED Array 49,5W 6000 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Pin-block type dissipater.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	37°, 46°, 78°

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

### PHYSICAL


<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	Light Source: 3,81 / Reflectors: Aluminium 0,95 - Transparent 3,41 - Concrete 4




### Light Bell Dimmable Dali designed by Piero Lissoni

Suspended luminaire for mounting on the ceiling with LED light source. (4 metres maximum distance to ceiling). Power supply source integrated into luminaire housing. Reflector not included; supplied separately.

- 07.9642.14ADA.Light Source Black
- 07.9630.AP.Reflector - (37°) 3139lm Polished aluminium / Anodized aluminium
- 07.9630.70.Reflector - (37°) 3139lm Matt White / Anodized aluminium
- 07.9630.AN.Reflector - (78°) 2733lm Anodized black / Gold
- 07.9630.MM.Reflector - (78°) 2733lm Dark brown / Gold
- 07.9630.7C.Reflector - (78°) 3233lm Matt Black / Galvanic Copper
- 07.9630.76.Reflector - (46°) 3518lm Transparent
- 07.9630.CE.Reflector Concrete

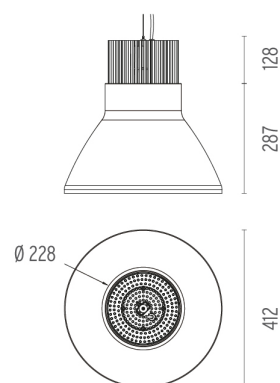

### CERTIFICATIONS

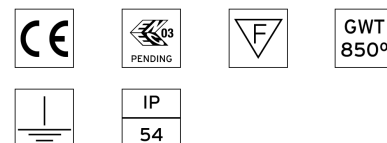

## Light Bell Dimmable Dali . Accessories

### Electrical



● F0556020

#### Power Supply Rose. Non Dimmable

Rosette for indoors. IP20.



● F0557020

#### Power supply rose. Dimmable Push/Dali

Rosette for indoors. IP20.



● 08.8775.40

#### Rosette IP54

## Light Bell Dimmable Dali . Lamps



#### LED Array

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:



LED Array



### Light Bell Dimmable Dali designed by Piero Lissoni

Suspended luminaire for mounting on the ceiling with LED light source. (4 metres maximum distance to ceiling). Power supply source integrated into luminaire housing. Reflector not included; supplied separately.

- 07.9642.14ADA.Light Source Black
- 07.9630.AP.Reflector - (37°) 3139lm Polished aluminium / Anodized aluminium
- 07.9630.70.Reflector - (37°) 3139lm Matt White / Anodized aluminium
- 07.9630.AN.Reflector - (78°) 2733lm Anodized black / Gold
- 07.9630.MM.Reflector - (78°) 2733lm Dark brown / Gold
- 07.9630.7C.Reflector - (78°) 3233lm Matt Black / Galvanic Copper
- 07.9630.76.Reflector - (46°) 3518lm Transparent
- 07.9630.CE.Reflector Concrete



### CERTIFICATIONS

