

G-O WHITE LIGHT

Number of heads	1
Mounting	Wall recessed
Lamps description	Top LED 1,2W 105 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor, Outdoor
Notes	Embedded light fixture for indoor use in all its finishes, except stainless steel which is suitable for outdoor use. Equipment (60.8495) for remote installation in an accessible place: it does not fit through the luminaire installation hole.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	74°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable dali
Emergency	Without
Insulation class	Class III






PHYSICAL


Cutout diameter (mm)	40
Diameter (mm)	44
Recessed depth (mm)	56
Construction material	Aluminium or Bronze or Stainless steel
Weight (kg)	0,20




G-O White Light
designed by Jorge Herrera

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

	09.3200.30A - 4lm	White
	09.3200.29A - 4lm	Anodised aluminium
	09.3200.55A - 4lm	Stainless steel
	09.3200.BZA - 4lm	Bronze
	09.3200.ANA - 4lm	Anodised aluminium / Black

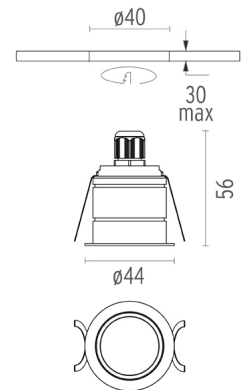

CERTIFICATIONS

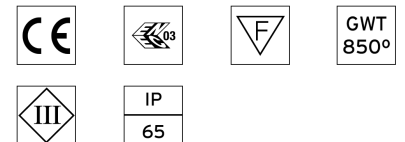

G-O White Light . Accessories

Power Supply



60.8495

Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5



60.9157

Electronic transformer with constant voltage (24V) for LED. 8W

Electronic transformer with constant voltage (24V) for LED. 8W. 90/264V.

Maximum length of 1.5 mm² secondary conductor (m): 5



G-O White Light
designed by Jorge Herrera

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

- 09.3200.30A - 4lm White
- 09.3200.29A - 4lm Anodised aluminium
- 09.3200.55A - 4lm Stainless steel
- 09.3200.BZA - 4lm Bronze
- 09.3200.ANA - 4lm Anodised aluminium / Black


Mounting




08.8422.00

Prepared for recessing

Housing for recessed installation made in anodized aluminium for outdoor installation.

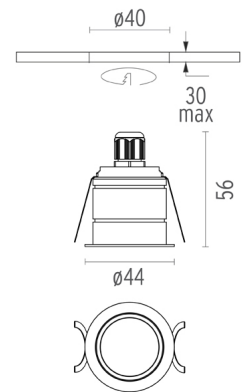

CERTIFICATIONS

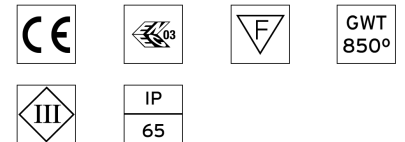

G-O White Light . Accessories

Electrical



○ 60.8635

Dimmable Dali control unit with 1 channel for 24V LED modules
Power supply not included.

G-O White Light . Lamps



Top LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Top LED



G-O White Light
designed by Jorge Herrera

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

○	09.3200.30A - 4lm	White
●	09.3200.29A - 4lm	Anodised aluminium
●	09.3200.55A - 4lm	Stainless steel
●	09.3200.BZA - 4lm	Bronze
●	09.3200.ANA - 4lm	Anodised aluminium / Black

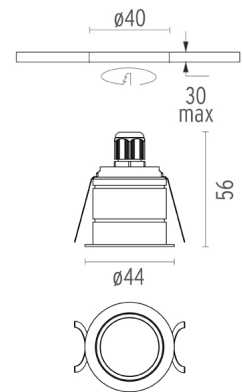

CERTIFICATIONS

