

G-O BLUE LIGHT

Number of heads

Mounting Wall recessed

Lamps description Top LED 1,2W 105 lm 3000K CRI 90

Luminaire luminous flux See reference number

Voltage (V) 24

Environment Indoor, Outdoor

NotesEmbedded light fixture for indoor use in all its finishes, except stainless steel which is suitable for outdoor use.

except stainless steel which is suitable for outdoor use. Equipment (60.8495) for remote installation in an accesible place: it does not fit through the luminarie installation hole.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric

ELECTRICAL

Transformer availability Separate item
Transformer mounting Remote

Transformer type Electronic, Electronic dimmable dali


Emergency Without Insulation class Class III

PHYSICAL

Cutout diameter (mm) 40
Diameter (mm) 44
Recessed depth (mm) 56

Construction material Aluminium or Bronze or Stainless steel

Weight (kg) 0,20

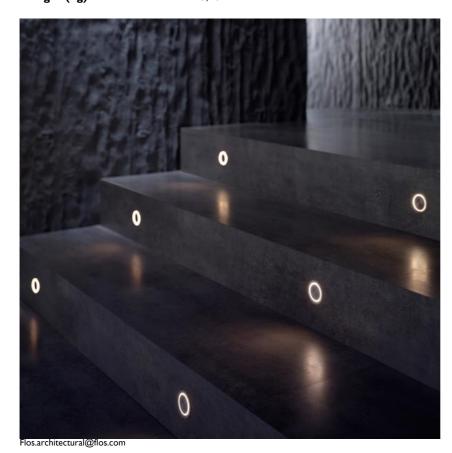




G-O Blue Light designed by Jorge Herrera

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

09.3202.30A - IIm White
09.3202.29A - IIm Anodised aluminium
09.3202.55A - IIm Stainless steel
09.3202.BZA - IIm Bronze
09.3202.ANA - IIm Anodised aluminium / Black



CERTIFICATIONS











www.flos.com



G-O Blue Light . Accessories

Power Supply





60.8495

Electronic transformer with constant voltage (24V) for LED. 20W Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secundary conductor (m): 5

60.9157

Electronic transformer with constant voltage (24V) for LED. 8W Electronic transformer with constant voltage (24V) for LED. 8W. 90/264V.

Maximum lenght of 1.5 mm2 secundary conductor (m): 5



G-O Blue Light designed by Jorge Herrera

09.3202.ANA - IIm

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

09.3202.30A - IIm White 09.3202.29A - IIm Anodised aluminium 09.3202.55A - IIm Stainless steel 09.3202.BZA - IIm Bronze


Mounting



08.8422.00

Prepared for recessing

Housing for recessed installation made in anodized aluminium for outdoor installation.



CERTIFICATIONS









Anodised aluminium / Black



Flos.architectural@flos.com www.flos.com



G-O Blue Light . Accessories

Electrical



60.8635

Dimmable Dali control unit with I channel for 24V LED modules Power supply not included.

G-O Blue Light . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:


Top LED



G-O Blue Light designed by Jorge Herrera

Semi recessed signalling lamp for indoor use on ceiling/wall. Power supply not included. 1000 mm power cable included.

09.3202.30A - IIm White
09.3202.29A - IIm Anodised aluminium
09.3202.55A - IIm Stainless steel
09.3202.BZA - IIm Bronze
09.3202.ANA - IIm Anodised aluminium / Black



CERTIFICATIONS











