

UT DOWNLIGHT TRIM Ø57 DALI VERSION

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array 18W 1600 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	13° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	90
Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,73





UT Downlight Trim Ø57 Dali Version
designed by FLOS Architectural

<div>Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.</div>

- 09.4513.30ADA - 1287lm White
- 09.4513.14ADA - 1287lm Black

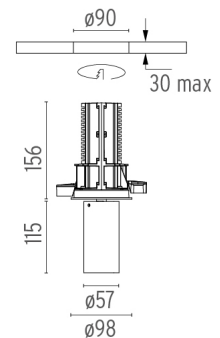

CERTIFICATIONS

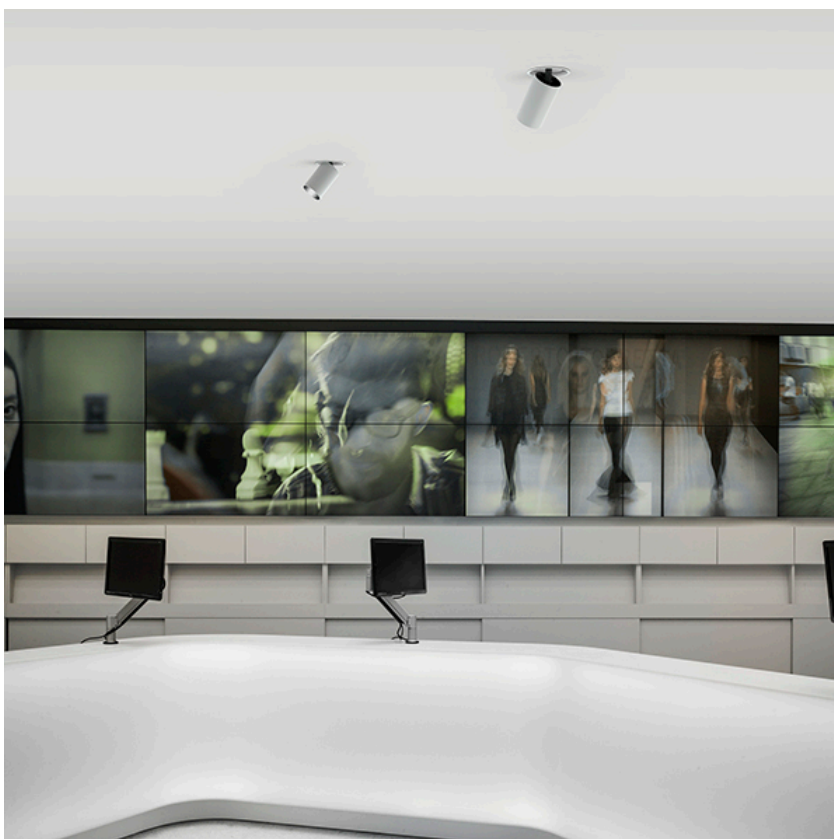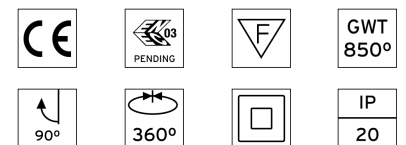

UT Downlight Trim Ø57 Dali Version . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00

Snoot Shielding Cone




UT Downlight Trim Ø57 Dali Version
designed by FLOS Architectural

<div>Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.</div>

○ 09.4513.30ADA - 1287lm White

● 09.4513.14ADA - 1287lm Black



CERTIFICATIONS



UT Downlight Trim Ø57 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Downlight Trim Ø57 Dali Version
designed by FLOS Architectural

<div>Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.</div>

● 09.4513.30ADA - 1287lm White

● 09.4513.14ADA - 1287lm Black



CERTIFICATIONS

