FLOS

UT DOWNLIGHT NO TRIM Ø57 NON DIMMABLE

Number of heads
Mounting
Lamps description
Luminaire luminous flux
Voltage (V)
Environment
Notes

I Ceiling recessed LED Array 18W 2000 Im 3000K CRI 80 See reference number 220/240 Indoor Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered separately.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	13° Spot

ELECTRICAL


Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 100 57

Aluminium

0,73

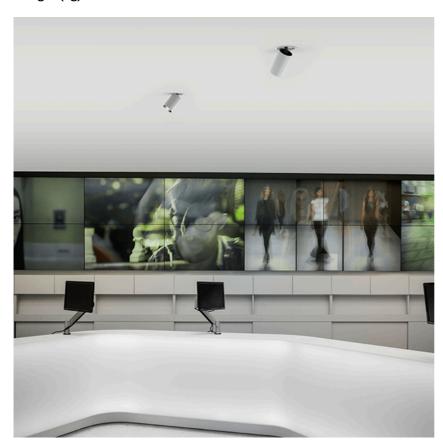





UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural


Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>





CERTIFICATIONS






FLOS

UT Downlight No Trim Ø57 Non Dimmable . Accessories



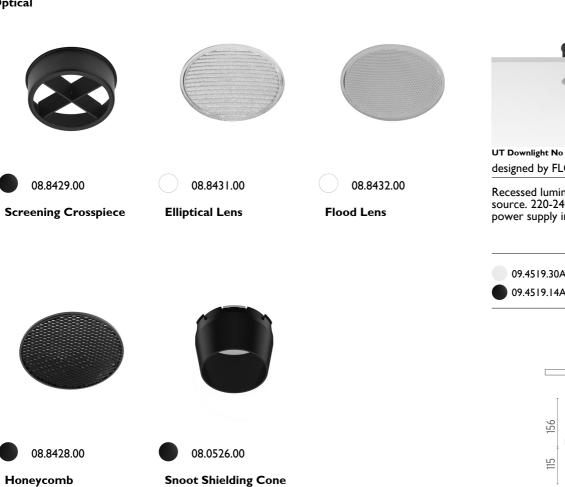



UT Downlight No Trim Ø57 Non Dimmable


designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>










FLOS

UT Downlight No Trim Ø57 Non Dimmable . Accessories

Mounting






Installation frame NO TRIM




UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>







UT Downlight No Trim Ø57 Non Dimmable . Lamps



LED Array LED Socket: Special base Lamp type: LED Array