

## UT DOWNLIGHT NO TRIM Ø57 DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array 18W 2000 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered separately.

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	13° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	100
<b>Spot diameter (mm)</b>	57
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,73






UT Downlight No Trim Ø57 Dali Version  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4519.30.ADA - 1557lm White
- 09.4519.14.ADA - 1557lm Black

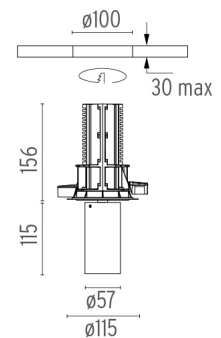

### CERTIFICATIONS

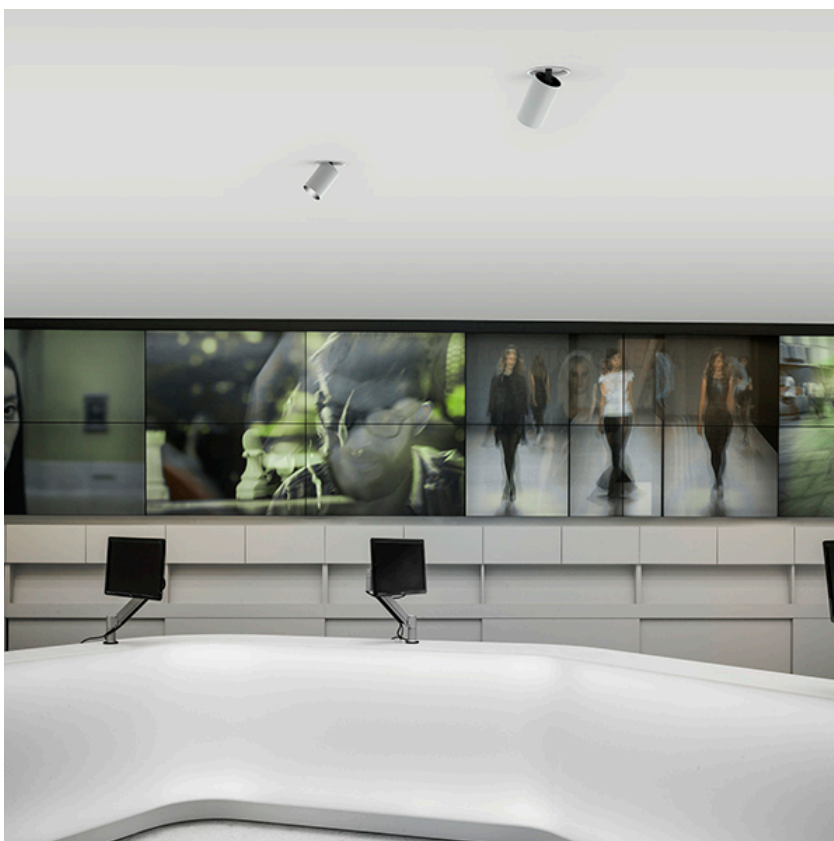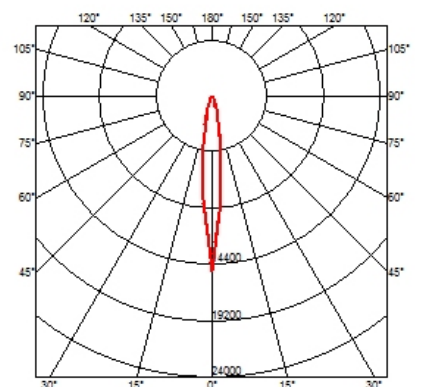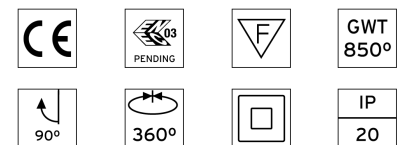

## UT Downlight No Trim Ø57 Dali Version . Accessories

### Optical



● 08.8429.00  
**Screening Crosspiece**



○ 08.8431.00  
**Elliptical Lens**



○ 08.8432.00  
**Flood Lens**



● 08.8428.00  
**Honeycomb**



● 08.0526.00  
**Snoot Shielding Cone**




**UT Downlight No Trim Ø57 Dali Version**  
designed by FLOS Architectural


Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4519.30.ADA - 1557lm White

● 09.4519.14.ADA - 1557lm Black



### CERTIFICATIONS

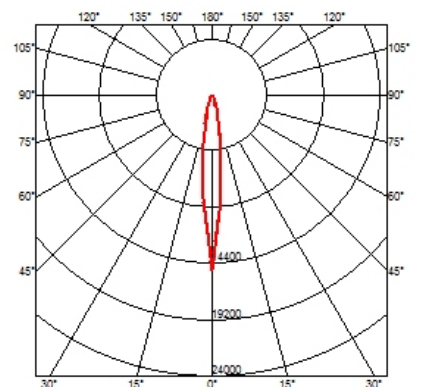

## UT Downlight No Trim Ø57 Dali Version . Accessories

### Mounting



● 08.8994.30

● 08.8994.14

**Installation frame NO TRIM**



**UT Downlight No Trim Ø57 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4519.30.ADA - 1557lm White

● 09.4519.14.ADA - 1557lm Black

## UT Downlight No Trim Ø57 Dali Version . Lamps



**LED Array**

**Lamp category:**


LED

**Socket:**

Special base

**Lamp type:**

LED Array

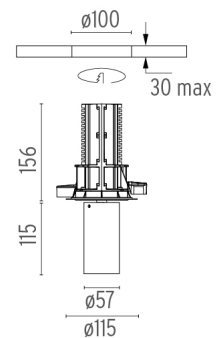

### CERTIFICATIONS

