

#### **UT DOWNLIGHT NO TRIM Ø57 NON DIMMABLE**

Number of heads

Mounting Ceiling recessed

Lamps description LED Array 18W 2000 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

Notes Screening crosspiece, lenses and Honeycomb directly installable

on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered

separately.

### **OPTICAL**

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 23° Medium

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II


#### **PHYSICAL**

Cutout diameter (mm) 100

Spot diameter (mm) 57

Construction material Aluminium

Weight (kg) 0,73

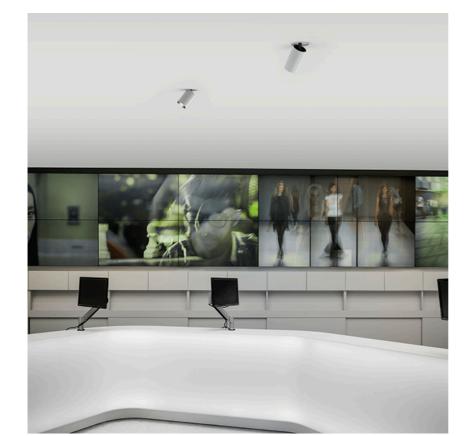




UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4520.30A - I381Im White 09.4520.14A - I381Im Black



### **CERTIFICATIONS**



















## UT Downlight No Trim Ø57 Non Dimmable . Accessories

## **Optical**







08.8429.00
Screening Crosspiece

08.8431.00 Elliptical Lens 08.8432.00

Flood Lens



designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4520.30A - 1381Im White
09.4520.14A - 1381Im Black






08.8428.00

Honeycomb

08.0526.00

**Snoot Shielding Cone** 



### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com



## UT Downlight No Trim Ø57 Non Dimmable . Accessories

### Mounting



08.8994.30

08.8994.14

Installation frame NO TRIM

# UT Downlight No Trim Ø57 Non Dimmable . Lamps



**LED Array** 

Lamp category:

LEC

Socket:

Special base

Lamp type:


LED Array



UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4520.30A - 1381Im White 09.4520.14A - 1381Im Black



# CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com