

UT DOWNLIGHT NO TRIM Ø57 NON DIMMABLE

Number of heads

Mounting Ceiling recessed

Lamps description LED Array 18W 2000 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

Notes Screening crosspiece, lenses and Honeycomb directly installable

on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered

separately.

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 39° Flood


ELECTRICAL

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

PHYSICAL

Cutout diameter (mm)100Spot diameter (mm)57Construction materialAluminium

Weight (kg) 0,73

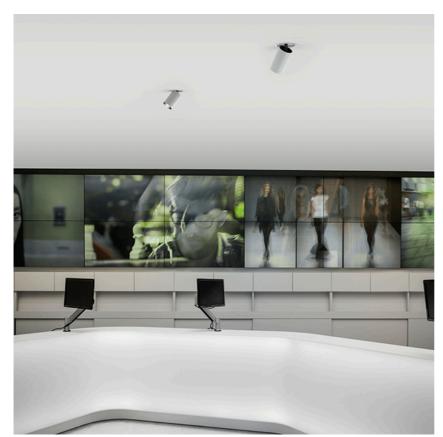



UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4521.30A - 1664lm White 09.4521.14A - 1664lm Black



CERTIFICATIONS



















UT Downlight No Trim Ø57 Non Dimmable . Accessories

Optical











Screening Crosspiece

08.8431.00

Elliptical Lens

08.8432.00

Flood Lens



designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4521.30A - 1664lm White 09.4521.14A - 1664lm Black








08.8428.00

Honeycomb

08.0526.00

Snoot Shielding Cone



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



UT Downlight No Trim Ø57 Non Dimmable . Accessories

Mounting



08.8994.30

08.8994.14

Installation frame NO TRIM

UT Downlight No Trim Ø57 Non Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4521.30A - 1664lm White 09.4521.14A - 1664lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com