## FLOS

## UT DOWNLIGHT NO TRIM Ø57 DALI VERSION

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes I Ceiling recessed LED Array 18W 1600 Im 3000K CRI 90 See reference number 220/240 Indoor Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered

OPTICAL

Reflector finish Aiming Light distribution symmetry Beam angle

## ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class Included Remote Electronic dimmable dali Without Class II

## PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 100 57 Aluminium 0,73


separately.

Aluminum

Adjustable

Symmetric

13° Spot

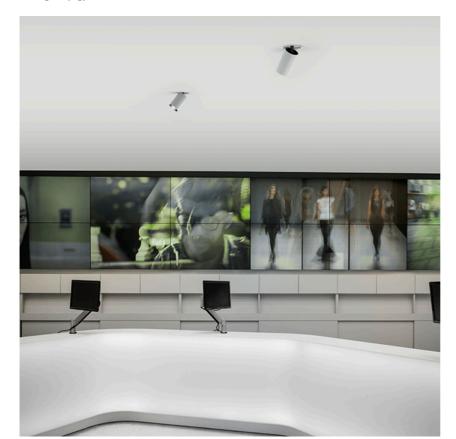





UT Downlight No Trim Ø57 Dali Version designed by FLOS Architectural


Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4522.30ADA - 1287lm White 09.4522.14ADA - 1287lm Black









# FLOS

## UT Downlight No Trim Ø57 Dali Version . Accessories

### Optical



08.8431.00





Flood Lens



UT Downlight No Trim Ø57 Dali Version designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>







08.8428.00


Honeycomb



08.0526.00Snoot Shielding Cone







# FLOS

## UT Downlight No Trim Ø57 Dali Version . Accessories

#### Mounting





Installation frame NO TRIM

UT Downlight No Trim Ø57 Dali Version . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



UT Downlight No Trim Ø57 Dali Version designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>



