FLOS

UT DOWNLIGHT NO TRIM Ø57 DALI VERSION

Number of heads

Mounting Ceiling recessed

Lamps description LED Array 18W 1600 lm 4000K CRI 90

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

Notes Screening crosspiece, lenses and Honeycomb directly installable

on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered

separately.

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 13° Spot

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II


PHYSICAL

Cutout diameter (mm) 100

Spot diameter (mm) 57

Construction material Aluminium

Weight (kg) 0,73

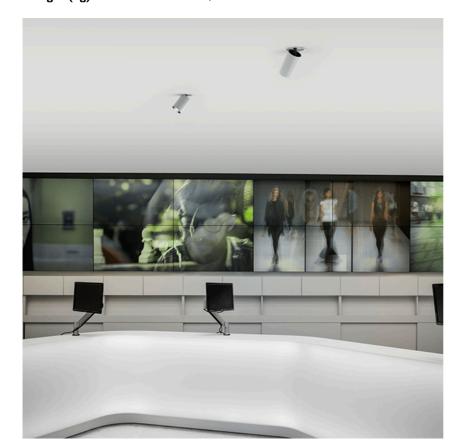




UT Downlight No Trim Ø57 Dali Version designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4525.30ADA - I34IIm White 09.4525.14ADA - I34IIm Black



CERTIFICATIONS























UT Downlight No Trim Ø57 Dali Version . Accessories

Optical









Screening Crosspiece

08.8429.00


08.8431.00 **Elliptical Lens** 08.8432.00

Flood Lens

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>



09.4525.30ADA - 1341Im White 09.4525.14ADA - 1341lm Black



Honeycomb

08.0526.00

Snoot Shielding Cone

115 ø57 ø115

CERTIFICATIONS




















UT Downlight No Trim Ø57 Dali Version . Accessories

Mounting



08.8994.30

08.8994.14

Installation frame NO TRIM

UT Downlight No Trim Ø57 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight No Trim Ø57 Dali Version designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4525.30ADA - 1341Im White
09.4525.14ADA - 1341Im Black



CERTIFICATIONS

















