

UT DOWNLIGHT TRIM Ø86 NON DIMMABLE

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array High Performances 27W 3214 lm 3000K CRI 80 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|------------------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 12° Spot |

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL



| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 120 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 1,36 |




UT Downlight Trim Ø86 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

| | |
|------------------------|-------|
| ● 09.4910.30A - 2259lm | White |
| ● 09.4910.14A - 2259lm | Black |

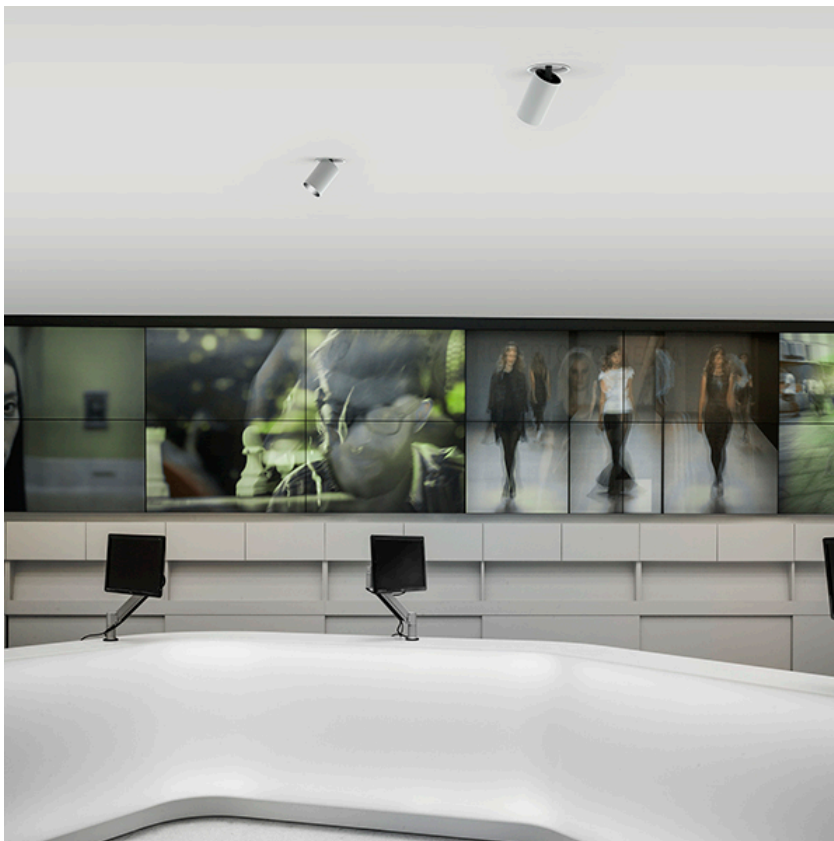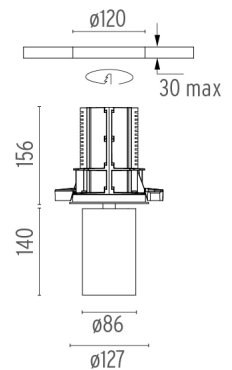

CERTIFICATIONS

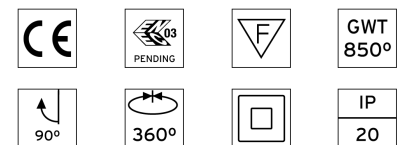

UT Downlight Trim Ø86 Non Dimmable . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Downlight Trim Ø86 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4910.30A - 2259lm White

● 09.4910.14A - 2259lm Black

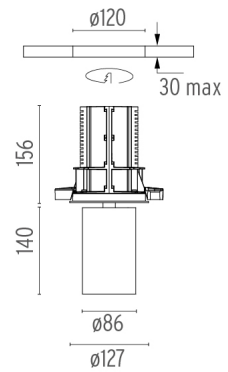

CERTIFICATIONS



UT Downlight Trim Ø86 Non Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight Trim Ø86 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4910.30A - 2259lm White
- 09.4910.14A - 2259lm Black

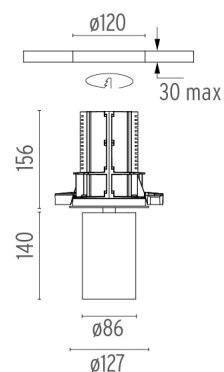

CERTIFICATIONS

