

UT DOWNLIGHT TRIM Ø86 DALI VERSION

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array High Performances 27W 3214 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	12° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL



Cutout diameter (mm)	120
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36




UT Downlight Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4910.30ADA - 2259lm White
- 09.4910.14ADA - 2259lm Black

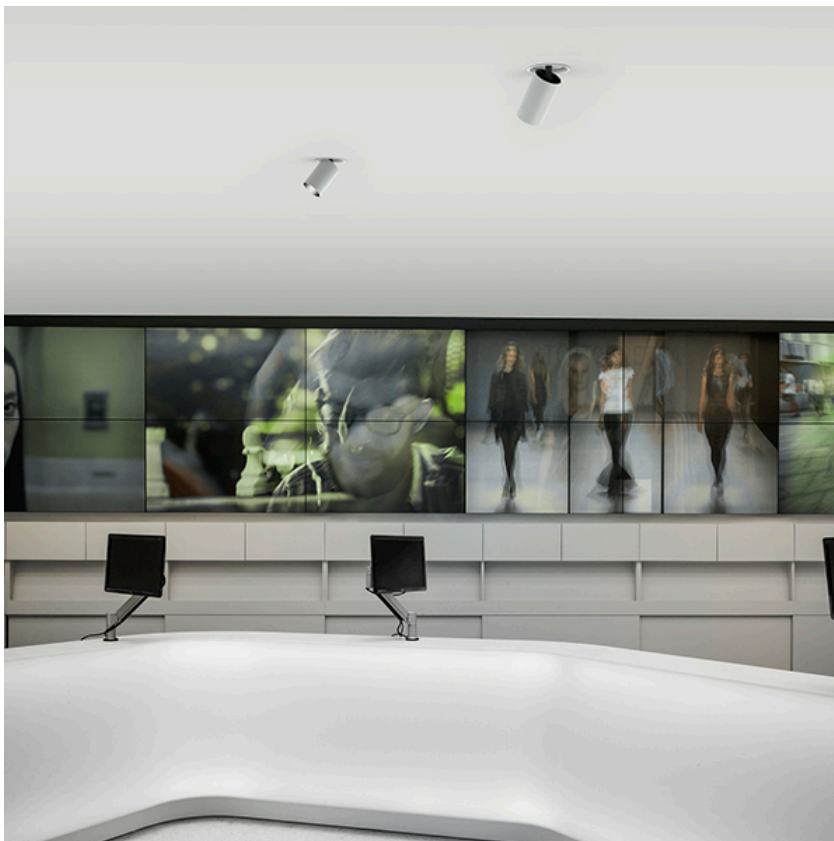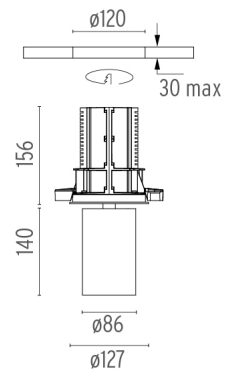

CERTIFICATIONS

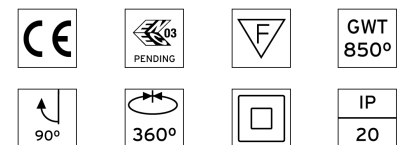

UT Downlight Trim Ø86 Dali Version . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens


Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Downlight Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4910.30ADA - 2259lm White

● 09.4910.14ADA - 2259lm Black

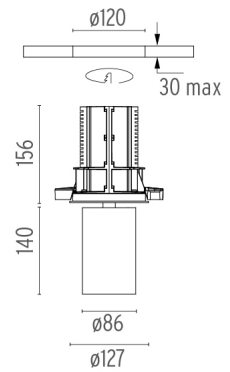

CERTIFICATIONS



UT Downlight Trim Ø86 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Downlight Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4910.30ADA - 2259lm White

● 09.4910.14ADA - 2259lm Black

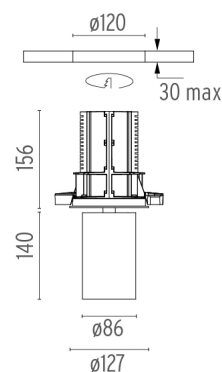

CERTIFICATIONS

