

## UT DOWNLIGHT TRIM Ø86 DALI VERSION

|                                |  |
|--------------------------------|--|
| <b>Number of heads</b>         | 1  |
| <b>Mounting</b>                | Ceiling recessed                                     |
| <b>Lamps description</b>       | LED Array High Performances 27W 2767 lm 4000K CRI 90 |
| <b>Luminaire luminous flux</b> | See reference number                                 |
| <b>Voltage (V)</b>             | 220/240  |
| <b>Environment</b>             | Indoor   |

### OPTICAL

|                                    |            |
|------------------------------------|------------|
| <b>Reflector finish</b>            | Aluminum   |
| <b>Aiming</b>                      | Adjustable |
| <b>Light distribution symmetry</b> | Symmetric  |
| <b>Beam angle</b>                  | 12° Spot   |

### ELECTRICAL

|                                 |                          |
|---------------------------------|--------------------------|
| <b>Transformer availability</b> | Included                 |
| <b>Transformer mounting</b>     | Remote                   |
| <b>Transformer type</b>         | Electronic dimmable dali |
| <b>Emergency</b>                | Without                  |
| <b>Insulation class</b>         | Class II                 |

### PHYSICAL



|                              |           |
|------------------------------|-----------|
| <b>Cutout diameter (mm)</b>  | 120       |
| <b>Spot diameter (mm)</b>    | 86        |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 1,36      |




**UT Downlight Trim Ø86 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4916.30ADA - 1945lm White
- 09.4916.14ADA - 1945lm Black

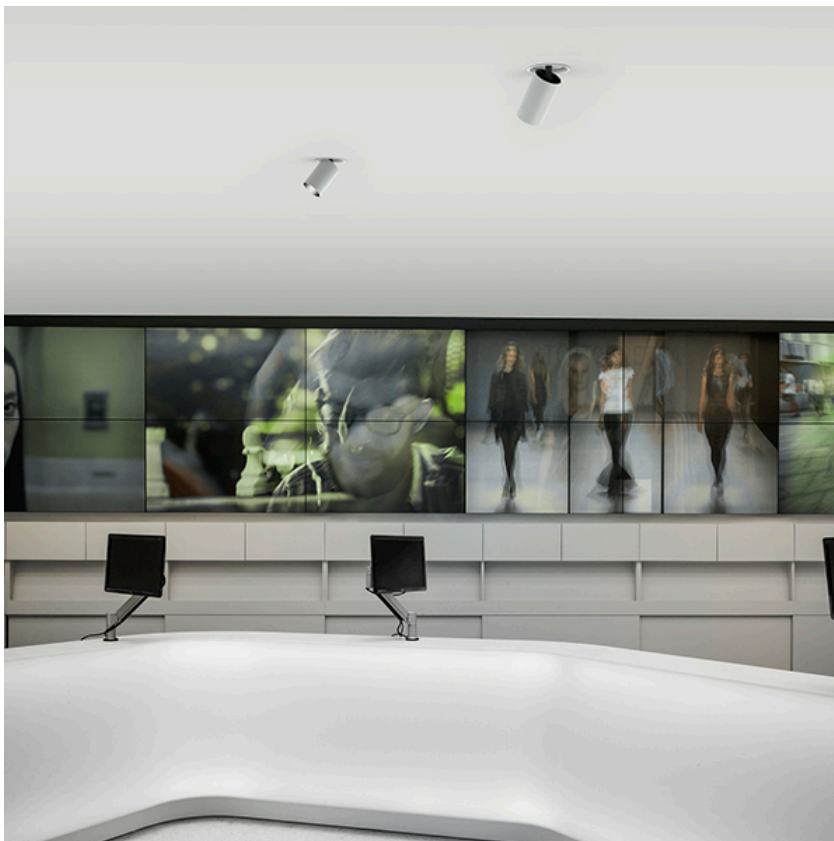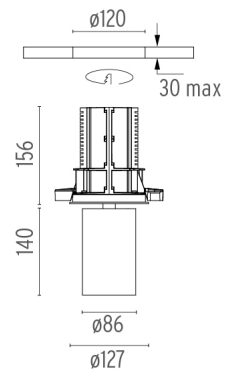

### CERTIFICATIONS

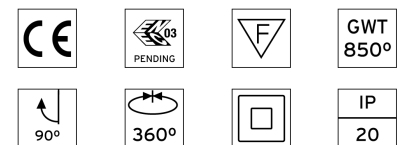

## UT Downlight Trim Ø86 Dali Version . Accessories

### Optical



○ 08.8163.68

#### Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

#### Flood lens


Flood lens made in press glass.



● 08.8495.14

#### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

#### Holding ring

Holding ring



● 08.8411.00

#### Screening crosspiece




**UT Downlight Trim Ø86 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4916.30ADA - 1945lm White


● 09.4916.14ADA - 1945lm Black

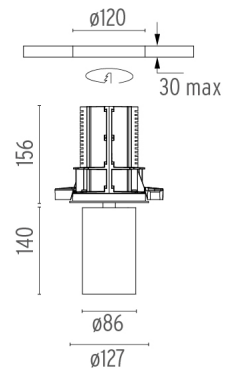

### CERTIFICATIONS



## UT Downlight Trim Ø86 Dali Version . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




**UT Downlight Trim Ø86 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4916.30ADA - 1945lm White

● 09.4916.14ADA - 1945lm Black

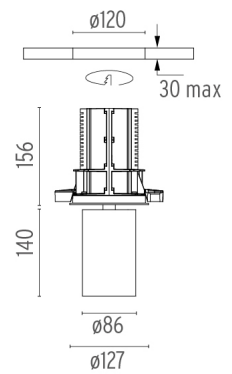

### CERTIFICATIONS

