## FLOS

### UT DOWNLIGHT NO TRIM Ø86 NON DIMMABLE

L

Number of heads
Mounting
Lamps description
Luminaire luminous flux
Voltage (V)
Environment
Notes

Ceiling recessed LED Array High Performances 27W 3214 Im 3000K CRI 80 See reference number 220/240 Indoor Pre-installation frame must be ordered separately.

### OPTICAL

Reflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle12° Spot

### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

### PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 132 86 Aluminium 0,97

Included

Remote

Class II

Electronic Without







UT Downlight No Trim Ø86 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>






#### CERTIFICATIONS



## FLOS

#### UT Downlight No Trim Ø86 Non Dimmable . Accessories

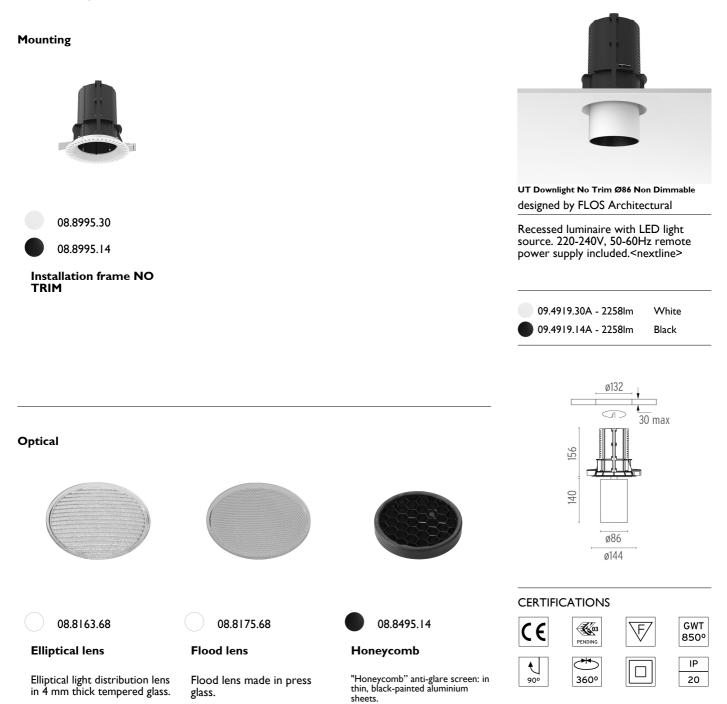

# FLOS

### UT Downlight No Trim Ø86 Non Dimmable . Accessories





08.8411.00

Screening crosspiece




UT Downlight No Trim Ø86 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>



### 07 30 max 95 07 30 max 07 30 max



### UT Downlight No Trim Ø86 Non Dimmable . Lamps



LED Array LED Socket: Special base Lamp type: LED Array