

UT DOWNLIGHT NO TRIM Ø86 DALI VERSION

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array High Performances 27W 3214 lm 3000K CRI 80 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |
| Notes | Pre-installation frame must be ordered separately. |

OPTICAL

| | |
|------------------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 37° Flood |

ELECTRICAL

| | |
|---------------------------------|--------------------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable dali |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 132 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 0,97 |




UT Downlight No Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4921.30ADA - 2053lm White
- 09.4921.14ADA - 2053lm Black

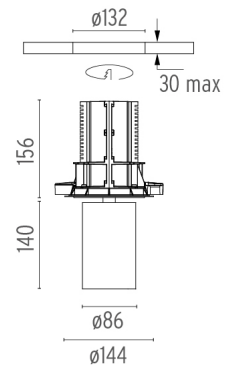

CERTIFICATIONS

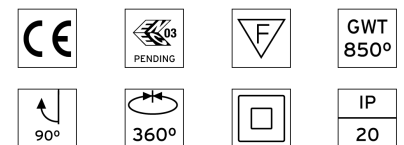

UT Downlight No Trim Ø86 Dali Version . Accessories

Mounting



● 08.8995.30

● 08.8995.14

Installation frame NO TRIM



UT Downlight No Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4921.30ADA - 2053lm White

● 09.4921.14ADA - 2053lm Black

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens


Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.

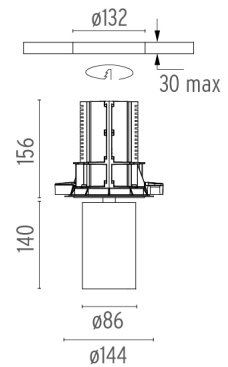

CERTIFICATIONS



UT Downlight No Trim Ø86 Dali Version . Accessories



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece



UT Downlight No Trim Ø86 Dali Version
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4921.30ADA - 2053lm White

● 09.4921.14ADA - 2053lm Black

UT Downlight No Trim Ø86 Dali Version . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array

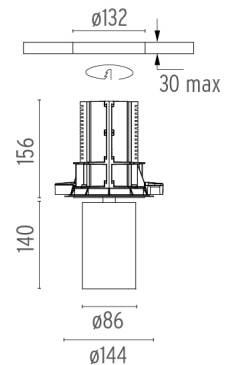

CERTIFICATIONS

