

## UT DOWNLIGHT NO TRIM Ø86 DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array High Performances 27W 2767 lm 4000K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame must be ordered separately.

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	24° Medium

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	132
<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,97





UT Downlight No Trim Ø86 Dali Version  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4926.30ADA - 1855lm White
- 09.4926.14ADA - 1855lm Black

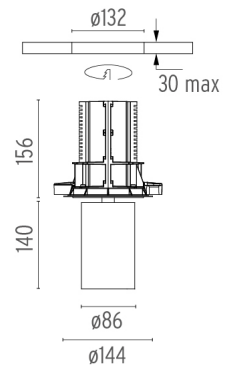

### CERTIFICATIONS

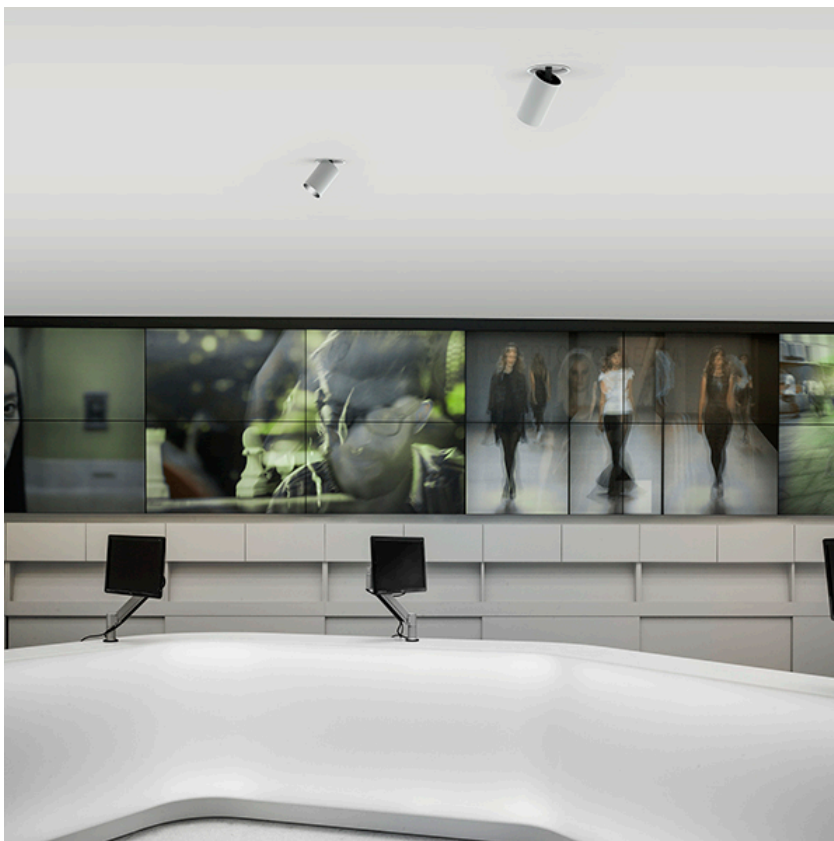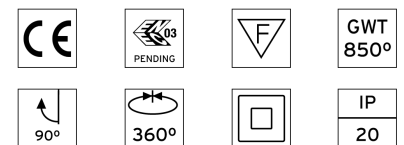

## UT Downlight No Trim Ø86 Dali Version . Accessories

### Mounting



○ 08.8995.30

● 08.8995.14

**Installation frame NO TRIM**



**UT Downlight No Trim Ø86 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4926.30ADA - 1855lm White

● 09.4926.14ADA - 1855lm Black

### Optical



○ 08.8163.68

**Elliptical lens**

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

**Flood lens**


Flood lens made in press glass.



● 08.8495.14

**Honeycomb**


"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.

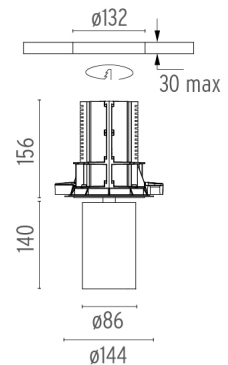

### CERTIFICATIONS



## UT Downlight No Trim Ø86 Dali Version . Accessories



● 08.8410.00

**Holding ring**

Holding ring



● 08.8411.00

**Screening crosspiece**



**UT Downlight No Trim Ø86 Dali Version**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

● 09.4926.30ADA - 1855lm White

● 09.4926.14ADA - 1855lm Black

## UT Downlight No Trim Ø86 Dali Version . Lamps



**LED Array**

**Lamp category:**


LED

**Socket:**

Special base

**Lamp type:**

LED Array

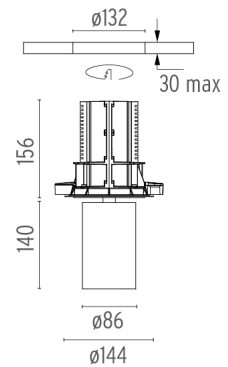

## CERTIFICATIONS

