

# FLOS

## USL 800

**Lamps description** 4 x T5 FQ G5 24W 7000 lm  
**Environment** Indoor

### OPTICAL



**Aiming** Fixed

### ELECTRICAL

**Control gear availability** Included  
**Control gear type** Electronic  
**Emergency** Without  
**Insulation class** Class I

### PHYSICAL

**Weight (kg)** 16,5

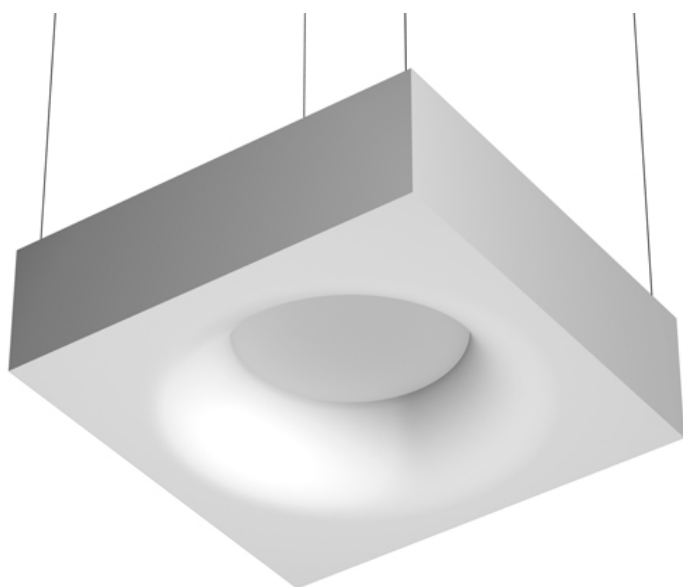


## USL 800

designed by FLOS Soft Architecture

Indirect ceiling-mounted lighting system. Indirect lighting for linear fluorescent lamps. It permits installation of Flos architectural product. Suspension cable length 4 meters.

● SA.4000.4.200 Raw

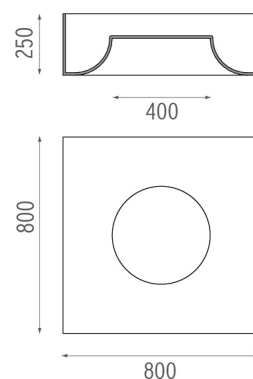

### CERTIFICATIONS



## USL 800 . Lamps



FQ


### T5 FQ 24W G5

**Lamp Watt:**  
24 W

**Lamp category:**  
Fluorescent tube

**Socket:**  
G5

**Lamp type:**  
T5 FQ




### USL 800

designed by FLOS Soft Architecture

Indirect ceiling-mounted lighting system. Indirect lighting for linear fluorescent lamps. It permits installation of Flos architectural product. Suspension cable length 4 meters.

● SA.4000.4.200 Raw

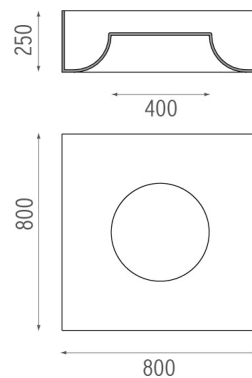

### CERTIFICATIONS

