

## USL I400 DIMMABLE DSI-DALI

**Lamps description** 4 xT5 FQ G5 54W 17800 lm  
**Environment** Indoor

### OPTICAL



**Aiming** Fixed

### ELECTRICAL

**Control gear availability** Included  
**Control gear type** Electronic dimmable Dsi & dali  
**Emergency** Without  
**Insulation class** Class I

### PHYSICAL


**Weight (kg)** 23,1

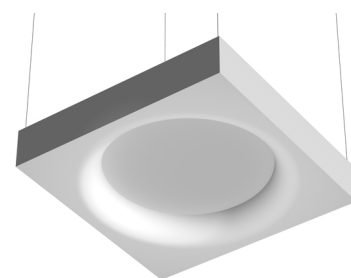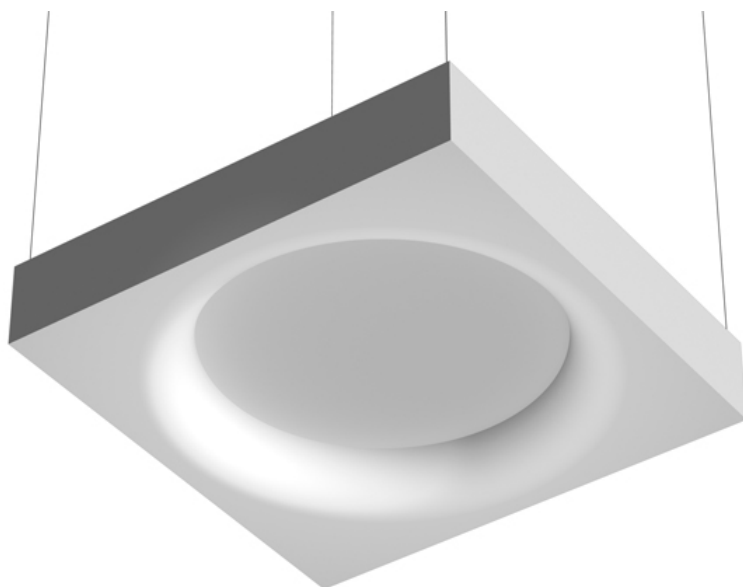

### USL I400 Dimmable DSI-Dali designed by FLOS Soft Architecture

Indirect ceiling-mounted lighting system. Indirect lighting for linear fluorescent lamps. It permits installation of Flos architectural product. Suspension cable length 4 meters.

● SA.4002.4.2DA Raw

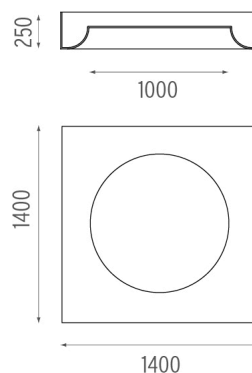

### CERTIFICATIONS



## USL I 400 Dimmable DSI-Dali . Lamps



FQ

### T5 FQ 54W G5

**Lamp Watt:**

54 W

**Lamp category:**


Fluorescent tube

**Socket:**

G5

**Lamp type:**


T5 FQ

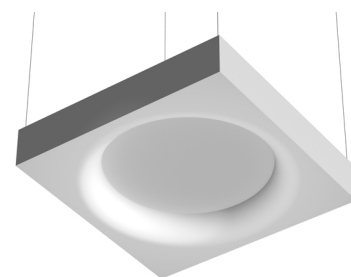

### USL I 400 Dimmable DSI-Dali designed by FLOS Soft Architecture

Indirect ceiling-mounted lighting system. Indirect lighting for linear fluorescent lamps. It permits installation of Flos architectural product. Suspension cable length 4 meters.

● SA.4002.4.2DA Raw

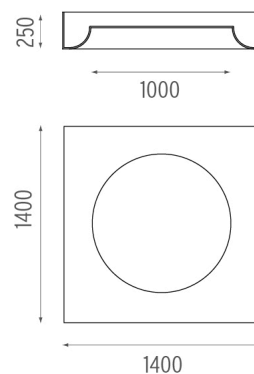

### CERTIFICATIONS

