


IN-FINITY 100 RECESSED NO TRIM 3000K GENERAL LIGHTING DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 34,1W/m 3915 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1125 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Recessed No Trim 3000K General Lighting Dali
designed by FLOS Architectural

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	109°

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I



- N10N053G30.DA 565mm - 1578lm White
- N10N083G30.DA 845mm - 2367lm White
- N10N113G30.DA 1125mm - 3156lm White
- N10N143G30.DA 1405mm - 3945lm White
- N10N163G30.DA 1690mm - 4734lm White
- N10N193G30.DA 1970mm - 5523lm White
- N10N253G30.DA 2530mm - 7101lm White
- N10N303G30.DA 3095mm - 8679lm White
- N10NFC3G30.DA Flat Corner - 3156lm White
- N10NDC3G30.DA Dihedral Corner - 3156lm White
- N10NEM3G30.DA Emergency - 3945lm White

PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium



CERTIFICATIONS

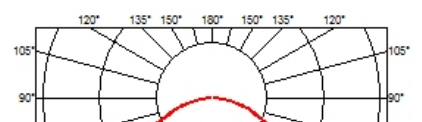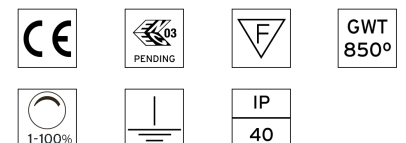

In-Finity 100 Recessed No Trim 3000K General Lighting Dali . Accessories

Structural



08.9054.40

Metal cover. Recessed No Trim. 100 mm

Metal cover for the different profiles. 2 unit kit.

In-Finity 100 Recessed No Trim 3000K General Lighting Dali . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Top LED





In-Finity 100 Recessed No Trim 3000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N10N053G30.DA 565mm - 1578lm White
- N10N083G30.DA 845mm - 2367lm White
- N10N113G30.DA 1125mm - 3156lm White
- N10N143G30.DA 1405mm - 3945lm White
- N10N163G30.DA 1690mm - 4734lm White
- N10N193G30.DA 1970mm - 5523lm White
- N10N253G30.DA 2530mm - 7101lm White
- N10N303G30.DA 3095mm - 8679lm White
- N10NFC3G30.DA Flat Corner - 3156lm White
- N10NDC3G30.DA Dihedral Corner - 3156lm White
- N10NEM3G30.DA Emergency - 3945lm White



CERTIFICATIONS

