


IN-FINITY 100 RECESSED NO TRIM 4000K GENERAL LIGHTING DALI

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 34,1W/m 4228 lm/m 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1125 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Recessed No Trim 4000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	109°



ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	135
Construction material	Aluminium

- N10N054G30.DA 565mm - 1555lm White
- N10N084G30.DA 845mm - 2333lm White
- N10N114G30.DA 1125mm - 3111lm White
- N10N144G30.DA 1405mm - 3889lm White
- N10N164G30.DA 1690mm - 4667lm White
- N10N194G30.DA 1970mm - 5445lm White
- N10N254G30.DA 2530mm - 7001lm White
- N10N304G30.DA 3095mm - 8557lm White
- N10NFC4G30.DA Flat Corner - 3111lm White
- N10NDC4G30.DA Dihedral Corner - 3111lm White
- N10NEM4G30.DA Emergency - 3889lm White



CERTIFICATIONS

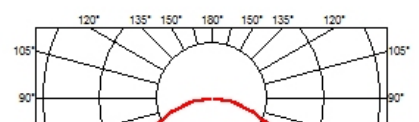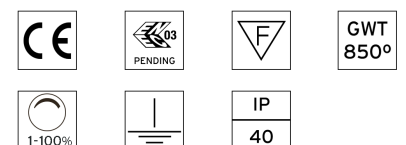

In-Finity 100 Recessed No Trim 4000K General Lighting Dali . Accessories


Structural



08.9054.40

Metal cover. Recessed No Trim. 100 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 100 Recessed No Trim 4000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 100 Recessed No Trim 4000K General Lighting Dali . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N10N054G30.DA 565mm - 1555lm White
- N10N084G30.DA 845mm - 2333lm White
- N10N114G30.DA 1125mm - 3111lm White
- N10N144G30.DA 1405mm - 3889lm White
- N10N164G30.DA 1690mm - 4667lm White
- N10N194G30.DA 1970mm - 5445lm White
- N10N254G30.DA 2530mm - 7001lm White
- N10N304G30.DA 3095mm - 8557lm White
- N10NFC4G30.DA Flat Corner - 3111lm White
- N10NDC4G30.DA Dihedral Corner - 3111lm White
- N10NEM4G30.DA Emergency - 3889lm White



CERTIFICATIONS

