


IN-FINITY 35 RECESSED NO TRIM 3000K GENERAL LIGHTING

Number of heads	1
Mounting	Recessed No Trim
Lamps description	Top LED 19,8W/m 2558 lm/m 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 35 Recessed No Trim 3000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	110°


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I



PHYSICAL

Recessed depth (mm)	120
Construction material	Aluminium

- N35N053G30B 565mm - 657lm White
- N35N083G30B 845mm - 986lm White
- N35N113G30B 1125mm - 1315lm White
- N35N143G30B 1405mm - 1643lm White
- N35N163G30B 1690mm - 1972lm White
- N35N193G30B 1970mm - 2301lm White
- N35N253G30B 2530mm - 2958lm White
- N35N303G30B 3095mm - 3616lm White
- N35NFC3G30B Flat Corner - 1315lm White
- N35NDC3G30B Dihedral Corner - 1315lm White
- N35NEM3G30B Emergency - 1643lm White

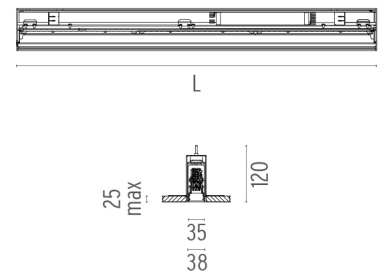

CERTIFICATIONS

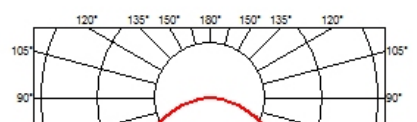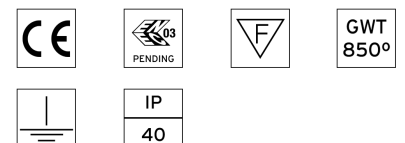

In-Finity 35 Recessed No Trim 3000K General Lighting . Accessories

Structural



08.9050.40

Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.



In-Finity 35 Recessed No Trim 3000K General Lighting

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

In-Finity 35 Recessed No Trim 3000K General Lighting . Lamps



Top LED

Lamp category:

LED



Socket:

Special base

Lamp type:

Top LED

- N35N053G30B 565mm - 657lm White
- N35N083G30B 845mm - 986lm White
- N35N113G30B 1125mm - 1315lm White
- N35N143G30B 1405mm - 1643lm White
- N35N163G30B 1690mm - 1972lm White
- N35N193G30B 1970mm - 2301lm White
- N35N253G30B 2530mm - 2958lm White
- N35N303G30B 3095mm - 3616lm White
- N35NFC3G30B Flat Corner - 1315lm White
- N35NDC3G30B Dihedral Corner - 1315lm White
- N35NEM3G30B Emergency - 1643lm White



CERTIFICATIONS

