

## IN-FINITY 35 RECESSED NO TRIM 3000K GENERAL LIGHTING DALI

<b>Number of heads</b>	1
<b>Mounting</b>	Recessed No Trim
<b>Lamps description</b>	Top LED 19,8W/m 2558 lm/m 3000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1400 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



### In-Finity 35 Recessed No Trim 3000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	110°



### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I



### PHYSICAL

<b>Recessed depth (mm)</b>	120
<b>Construction material</b>	Aluminium

- N35N053G30BDA 565mm - 657lm White
- N35N083G30BDA 845mm - 986lm White
- N35N113G30BDA 1125mm - 1315lm White
- N35N143G30BDA 1405mm - 1643lm White
- N35N163G30BDA 1690mm - 1972lm White
- N35N193G30BDA 1970mm - 2301lm White
- N35N253G30BDA 2530mm - 2958lm White
- N35N303G30BDA 3095mm - 3616lm White
- N35NFC3G30BDA Flat Corner - 1315lm White
- N35NDC3G30BDA Dihedral Corner - 1315lm White
- N35NEM3G30BDA Emergency - 1643lm White

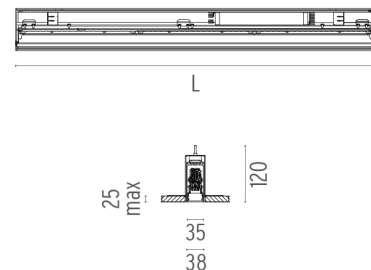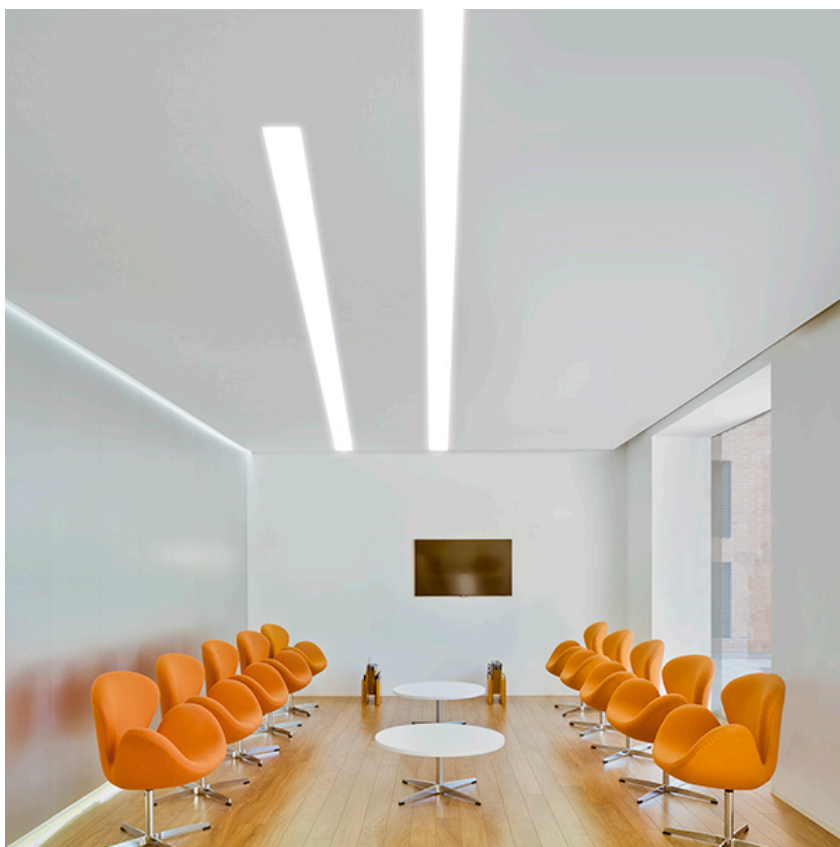

### CERTIFICATIONS

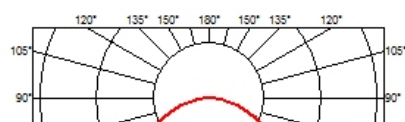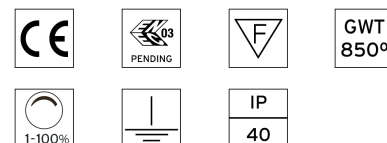

## In-Finity 35 Recessed No Trim 3000K General Lighting Dali . Accessories

### Structural



08.9050.40

#### Metal cover. Recessed No Trim. 35 mm

Metal cover for the different profiles. 2 unit kit.

## In-Finity 35 Recessed No Trim 3000K General Lighting Dali . Lamps



#### Top LED

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:

Top LED





### In-Finity 35 Recessed No Trim 3000K General Lighting Dali

designed by FLOS Architectural

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

- N35N053G30BDA 565mm - 657lm White
- N35N083G30BDA 845mm - 986lm White
- N35NI13G30BDA 1125mm - 1315lm White
- N35NI43G30BDA 1405mm - 1643lm White
- N35NI63G30BDA 1690mm - 1972lm White
- N35NI93G30BDA 1970mm - 2301lm White
- N35N253G30BDA 2530mm - 2958lm White
- N35N303G30BDA 3095mm - 3616lm White
- N35NFC3G30BDA Flat Corner - 1315lm White
- N35NDC3G30BDA Dihedral Corner - 1315lm White
- N35NEM3G30BDA Emergency - 1643lm White



### CERTIFICATIONS

